

### Bosch Singular Condensing Combi Boilers

Efficient Heating & Hot Water

Bosch Singular combi boilers are the "singular solution" for efficient, dependable home heating with up to 7.7 gallons per minute of domestic hot water production. Singular boilers are a cost-effective wall-mounted combi boiler that can be used in many hydronic heating applications. BOSCH



NEW 2024



# A Singular Solution For Reliable Heat & Hot Water

## Bosch Singular Condensing Combi Boilers

Bosch Singular combi boilers are the "singular solution" for efficient, dependable home heating with up to 7.7 gallons per minute of domestic hot water production. Depending on incoming water temperature, Singular can run up to three showers and a dishwasher simultaneously. Singular is a wall-mounted combi boiler that can be used in many hydronic heating applications. Their small, lightweight form makes for easy installation, and the stainless steel heat exchanger system offers excellent performance at a cost-effective price. Singular is highly efficient, with a 95% AFUE rating; this makes your new system eligible for up to 75% savings in local and/or federal energy rebate programs. Visit BoschHeatingandCooling.com to find the available efficiency rebates in your area.<sup>◊</sup>



Visit BoschHeatingAndCooling.com to find the available efficiency rebates in your area. §For complete warranty details please visit boschheatingandcooling.com

### Bosch Singular Boiler Applications

Singular combi wall boilers provide efficient heating and plenty of hot water for many residential applications. There are two different models to choose from: 155K BTU and 199K BTU. Both can make enough domestic hot water for most residential bathing needs.

## Superior Design & Components

Depending on inlet water temperature, the 4000 can run between 2 and 3 showers and the 5200 can run 3 showers plus a dishwasher. There's plenty of endless hot water available with Singular. Both models have a small footprint and are under 80 pounds, making installation a breeze. Features like an exhaust gas outlet sensor and a standard inlet filter screen to keep out debris provide extra protection for the boiler.


#### Residential Limited Warranty<sup>§</sup>

Receive peace-of-mind knowing you will have a 10 year heat exchanger, 5 year parts, and 1 year labor limited warranty. This standard offering covers the components incorporated into the Singular boiler at the time of manufacture.

### Before Everything, There's Bosch.

Simple. Reliable. Innovative.



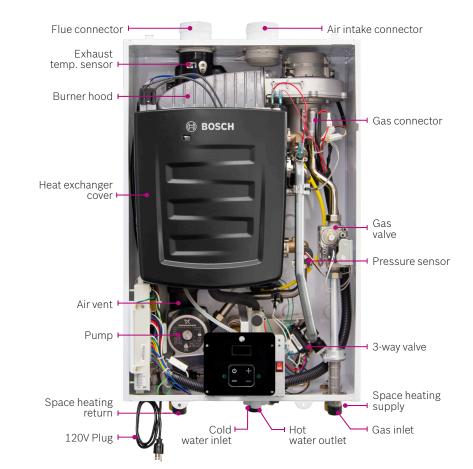

MODELS		SINGULAR 4000	SINGULAR 5200
PART NUMBER		7-738-007-219	7-738-007-220
HEAT CAPACITY (INPUT)	SPACE HEATING	19,900-80,000 BTU/H	19,900-140,000 BTU/H
	DOMESTIC HOT WATER	19,900-155,000 BTU/H	19,900-199,000 BTU/H
FLOW RATE (DHW)	45°F (25°C) TEMP RISE	6.0GPM (23LPM)	7.7GPM (29LPM)
	67°F (37°C) TEMP RISE	4.0GPM (15LPM)	5.2GPM (20LPM)
AFUE	NATURAL GAS (PROPANE)	95.0% (95.0%)	95.0% (95.0%)
DIMENSIONS (W X H X D)		18.1" x 27.6" x 11.6" (460 mm x 700 mm x 295 mm)	
INSTALLATION TYPE		Indoor wall-hung	
VENTING METHOD		Forced draft direct vent	
IGNITION		Electronic	
WATER PRESSURE (HYDRONIC/DHW)		12~30psi/15~150 psi	
SUPPLY PRESSURE	NATURAL GAS	3.5" – 10.5" WC	
	PROPANE	8" - 13" WC	
MINIMUM FLOW RATE (DHW)		0.5GPM (1.9LPM)	
TEMPERATURE RANGE	SPACE HEATING	82°F – 180°F (27°C – 82°C)	
	DHW	86°F – 140°F (31°C – 60°C)	
CONNECTION SIZES	SUPPLY/RETURN	1" NPT	
	COLD WATER INLET	3/4" NPT	
	HOT WATER OUTLET	3/4" NPT	
	GAS INLET	3/4" NPT	
POWER SUPPLY	MAIN SUPPLY	120V AC, 60 Hz / use less than 5 AMP	
PRIMARY & SECONDARY HEAT EXCHANGER		Stainless steel	
VENTING	EXHAUST/INTAKE	2" or 3" PVC, CPVC, Polypropylene Special gas vent type BH (Class II, A/B/C)	
	2IN.	60ft (18.3m)	
	3IN.	150ft (45.7m)	
	VENT CLEARANCES	0" to combustibles	
SAFETY DEVICES		Flame rod, APS, over heat preventer, LWCO switch, exhaust temp. high limit sensor, power surge fuse	

## **About Bosch**

#### **Bosch Group**

The Bosch Group is a leading global supplier of technology and services in the areas of Automotive, Industrial Technology, Consumer Goods and Building Technology. The company was founded in Stuttgart, Germany, in 1886 and presently has more than 440 subsidiaries and is represented in over 150 countries.

In the U.S., Canada and Mexico, the Bosch Group manufactures and markets automotive original equipment and aftermarket solutions, industrial drives and control technology, power tools, security and communication systems, packaging technology, thermotechnology, household appliances and software solutions. The Bosch Group's products and services are designed to improving quality of life by providing innovative and beneficial solutions. In this way, the company offers technology worldwide that is "Invented for life." Additional information is available online at boschheatingandcooling.com and bosch.ca.

#### **Bosch Thermotechnology in North America**

Bosch Thermotechnology is a leading source of high quality water heating and comfort systems. The company offers gas tankless, electric whole house and point-of-use water heaters, Bosch and Buderus floor-standing and wall mounted boilers, Bosch and FHP geothermal, water-source and air-source systems as well as controls and accessories for all product lines. Bosch Thermotechnology is committed to being Simply Smart by offering products that work together as integrated systems that enhance quality of life in an ultra-efficient and environmentally friendly manner. For more information, visit boschheatingandcooling.com.

#### **Bosch Water-Source Heat Pumps: Made in the U.S.A.**

Bosch and FHP water-source and geothermal heat pumps are made by highly trained and skilled workers in our factory based in Fort Lauderdale, Florida. They are manufactured with rigorous standards and factory testing ensuring high efficient operation over the life of the unit. Bosch's ISO 9001 and ISO 14001 certified facilities provide consistent quality in every unit built.



www.BoschHeatingAndCooling.com

Bosch Thermotechnology Corp. Watertown, MA • Londonderry, NH • Ft. Lauderdale, FL General Inquiries: 1-866-642-3198

Copyright © 2021 Bosch Thermotechnology Corp. All rights reserved. Subject to change without notice.

75H991865A 4-21