



Z-DENS

Polypropylene Vent Systems

for High Efficiency Condensing Appliances

Single Wall Rigid • Flexible Liner

Cascade • Concentric



Intertek Tested,
Approved &
Listed to ULC
S636 as a Type
BH Gas Vent
System





Z-Flex® Joins Forces with Cox Geelen®

Z-Flex® North America's leading independent manufacturer of specialty venting systems for over 35 years; has joined forces with Cox Geelen®, one of Europe's leading innovators and manufacturers of polypropylene venting systems.

Cox Geelen's manufacturing roots date back over a century and are recognized today worldwide for their technical knowledge, OEM experience and environmentally responsible business philosophy in the polypropylene venting industry.

Z-Flex® is proud to offer this polypropylene venting system, branded Z-DENS, to our highly acclaimed product line-up which includes Z-VENT® and NovaVENT®.

Recent developments in flue systems for use with high efficiency heating appliances, combined with the increased familiarity of use and installer confidence in polypropylene venting systems, has led to the development and continuous improvement of the polypropylene Z-DENS system.

Designed and Tested Safe

Unlike most PVC and CPVC pipe:

- Z-DENS is specifically designed, tested and listed as a vent system.
- Z-DENS is manufactured from environmentally safe and sustainable fire retardant polypropylene, offering superior performance.
- Z-DENS does not require explosive or toxic cleaners, primers or cements; eliminating the safety and health concerns associated with these products.
- Z-DENS Self-Sealing design does not require any curing time, significantly reducing installation times and allows immediate system start up.
- Z-DENS can be used to vent appliances in New York City where PVC is **NOT PERMITTED**.

Z-DENS is available in diameters 2" (60 mm), 3" (80 mm), 4" (110 mm), 5" (125 mm), 6" (160 mm) and 8" (200 mm). Z-DENS is also fully compatible with Z-DENS FLEX and Z-DENS CONCENTRIC making for a complete and safe flue gas system.

Approvals

- Tested and Listed to ULC S636
- Conforms to the UL1738 requirements for category IV condensing appliances
- CE marked according to the European standard EN 14471
- Conforms to Gastec Qa 83-1

Recyclable

At the end of its life cycle, Z-DENS can be completely recycled.




Z-DENS
SINGLE WALL

Z-DENS
CONCENTRIC




Z-DENS FLEX


Z-DENS Direct Vent Applications*

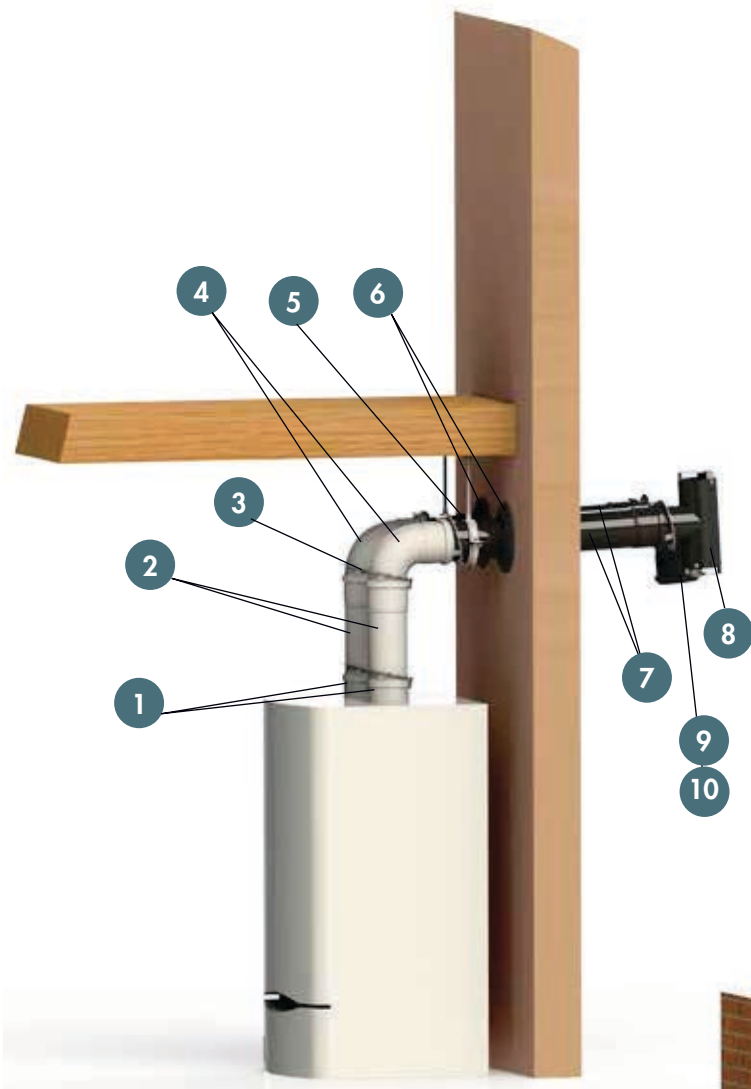


Horizontal Vent and Air - Same Pressure Zone

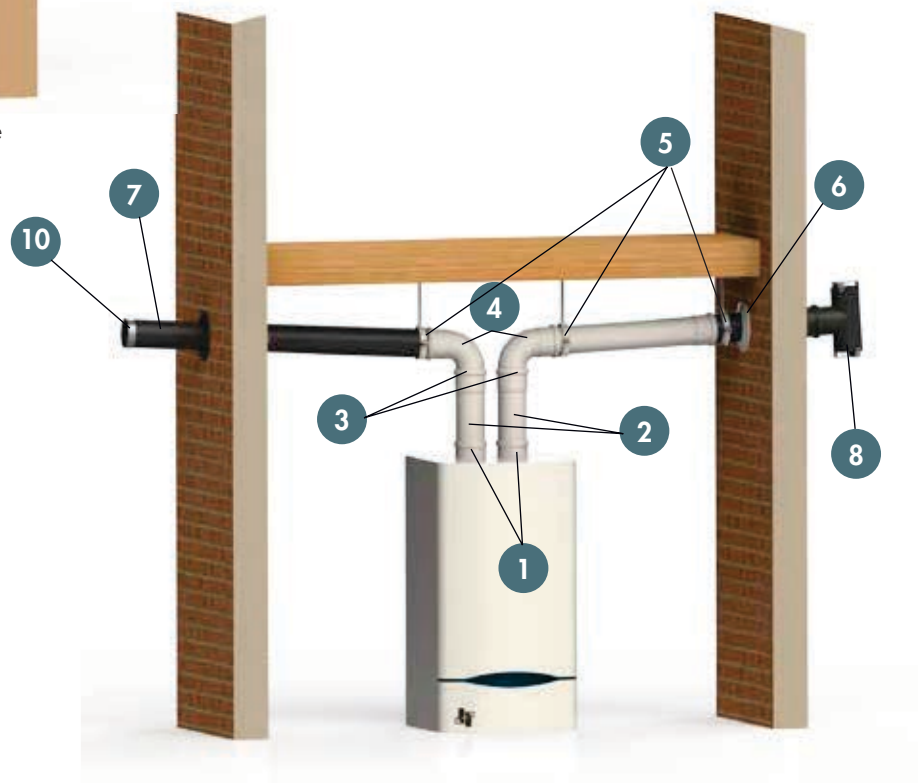

Horizontal Vent and Air - Different Pressure Zones

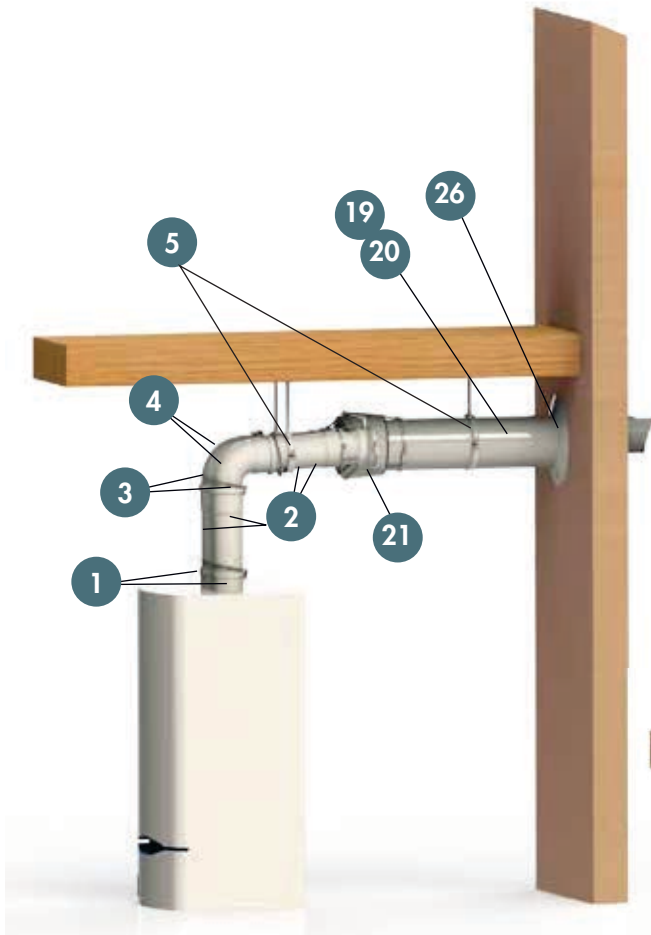


Horizontal Vent and Air with Horizontal Concentric Termination Kit

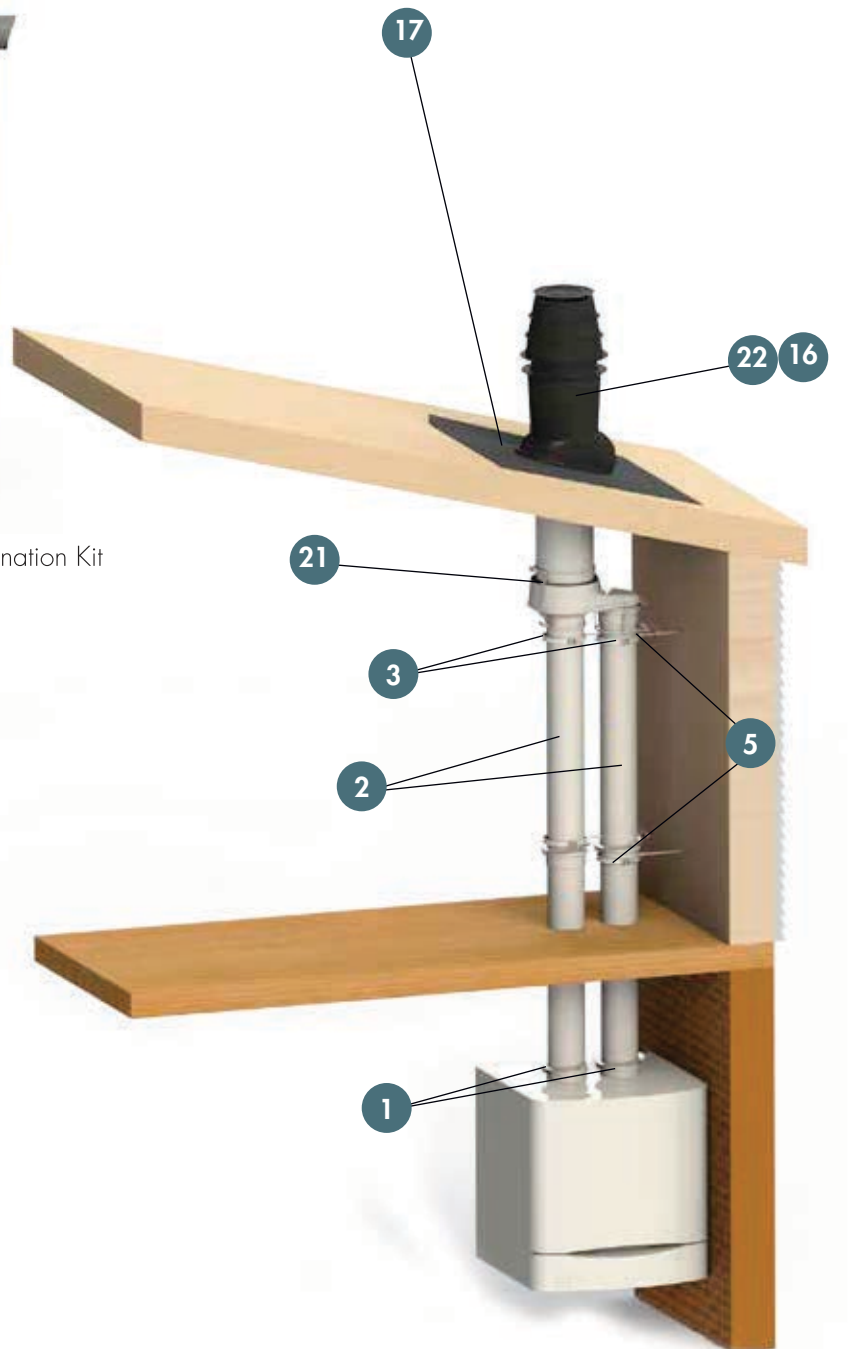


Vertical Vent and Air with Vertical Concentric Termination Kit


Z-DENS Direct Vent Applications*

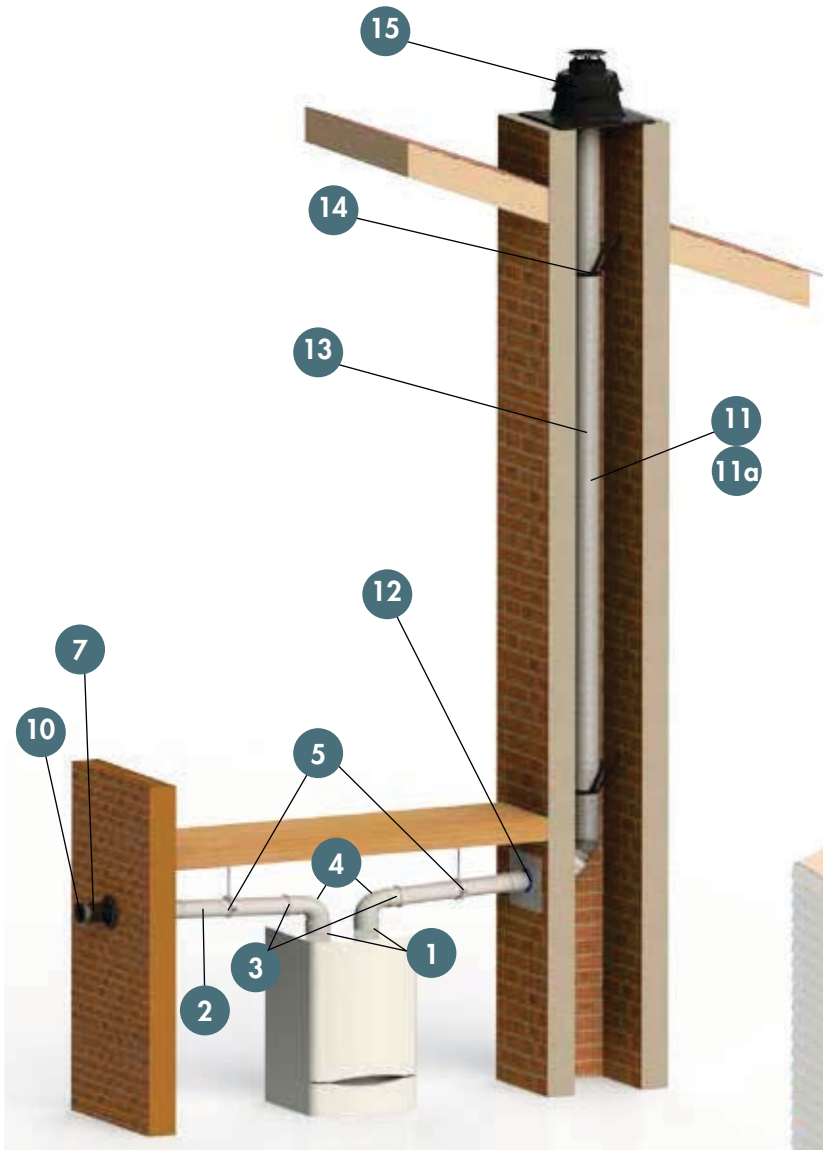


Vertical Flex Vent in Clean Unused Chimney with Chimney Cover and Horizontal Air

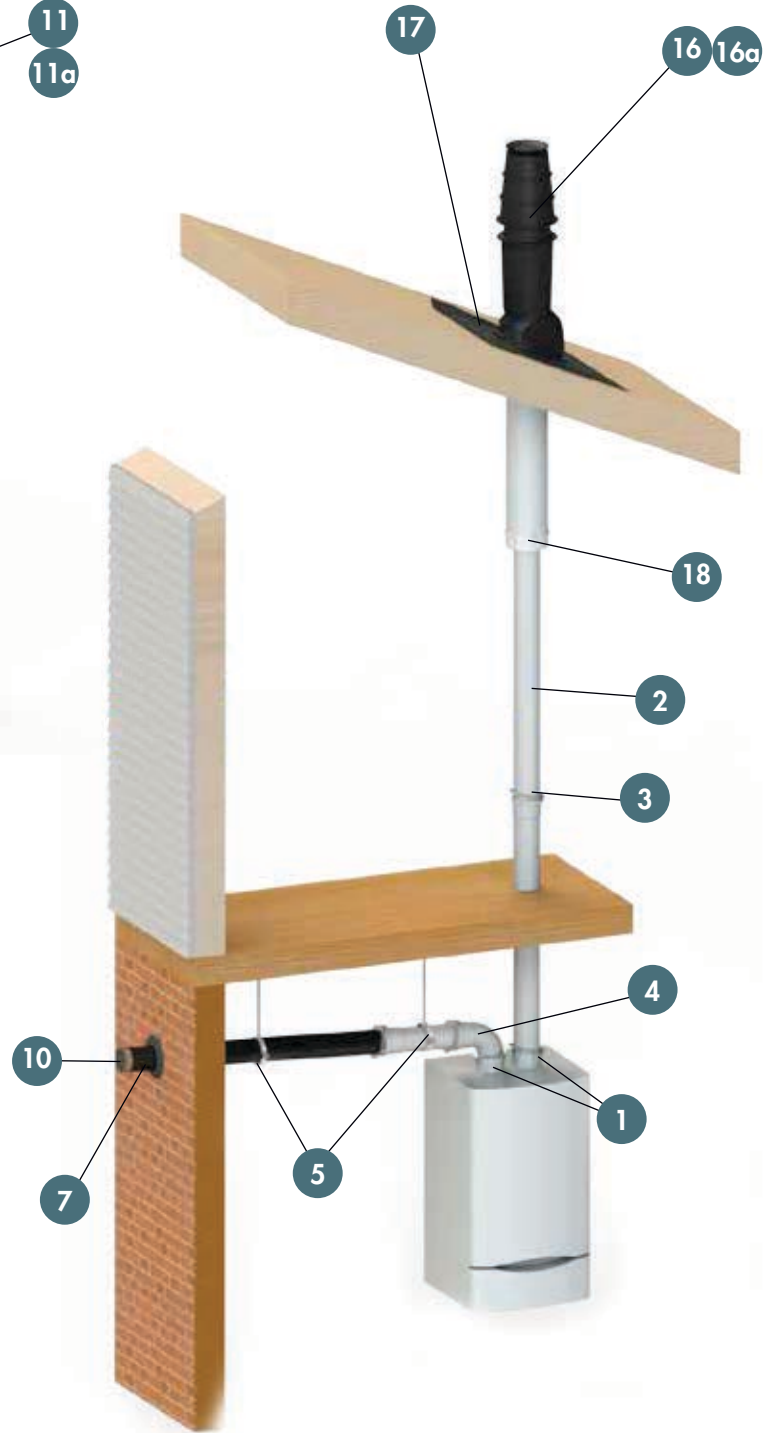

Vertical Vent and Horizontal Air with Vertical Termination

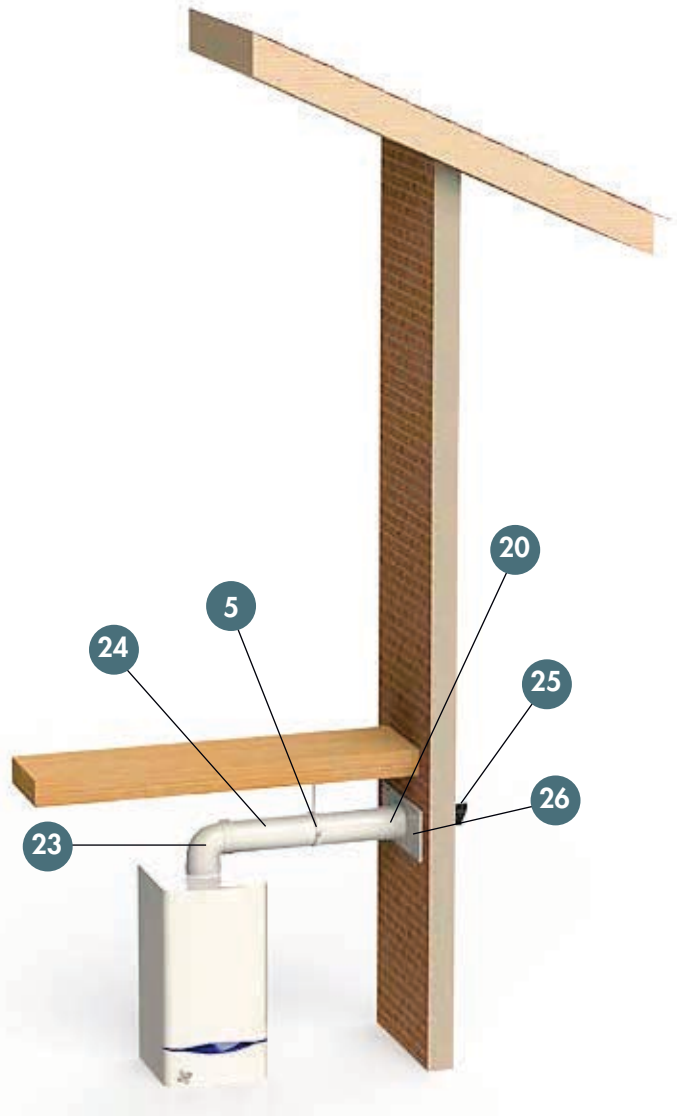

Concentric Horizontal

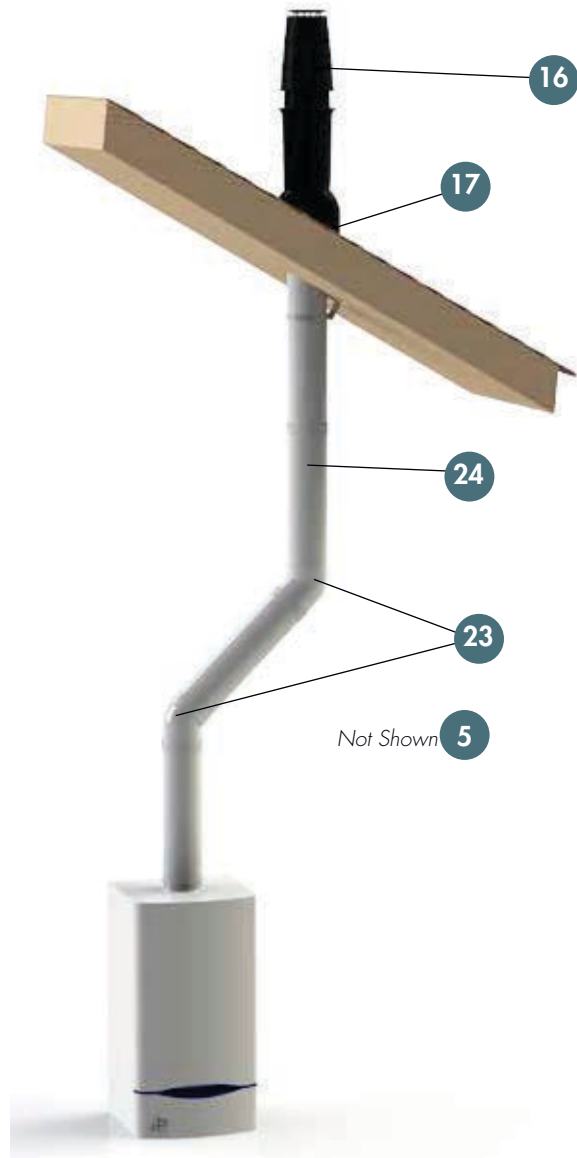

Concentric Vertical

Z-DENS Direct Vent Applications*

Item #	Part ID	Description
1	2ZDCPVC(2,3,4,6)	Adaptor CPVC/PVC Coupling
	2ZDCPVCF(3,4,6)	Adaptor CPVC/PVC Pipe
	2ZDCPVC(2,3,4,6)	Adaptor - Appliance with Gasket & Clamp CPVC/PVC
	2ZDCPVC3L	Adaptor - Appliance with Gasket & Clamp CPVC/PVC - US Boiler Alpine Wall Mount
	2ZDIBC4	Adaptor IBC SL 4"
	2ZDCPVCS(3,4)	Adaptor - Appliance with Seal CPVC/PVC - Bosch Greenstar
	2ZDZV(3,4,6,8)	Adaptor Z-Vent
	2ZDTA(42,43,4)	Adaptor Takagi TH3-DV/140-540
	2ZDIAMT0(6,8)	Adaptor - Laars MagnaTherm MGT/H/V
	2ZDAEDR(6,8)	Adaptor Fulton Endura
2	2DAABM(06,08)	Adaptor Aerco Benchmark
	2ZDWASF10(06,08)	Adaptor Weil McLain Slimfit
	2ZDP(2,3,4) (12,24,36,72) or 2ZDP(5,6,8) (24,36,72)	Pipe
	2ZDAP(2,3,4)	Adjustable Pipe
3	2ZDLC(2,3,4,5,6,8)	Locking Clamp - 1 /Joint Required
4	2ZDE(2,3,5,6,8) (45,87) or 2ZDE4(45,87)UV	Elbow 45° or 87°
5	2ZDFB(2,3,4,5,6,8)	Fixing Bracket/Support Clamp. All Thread Field Supplied. See Note 3
6	2ZDWPB(2,3) or 2ZDWP(5,6)	Wall Plate
7	2ZDP(2,3)(12,24,36) UV	Pipe UV-Black
8	2ZDTT(2,3,4,5,6,8)	Termination Tee with Screens
9	2ZDE(2,3,4)(45,87)UV	Elbow UV-Black (2" & 3") Grey (4")

Item #	Part ID	Description
10	2ZDES(2,3,4,5,6,8)	End Screen
11	2ZDFK(2,3,4)(25,35)	Flexible Kit - Chimney - 25' or 35' (Includes Items 12 13 14 15)
11a	2ZDFKX(2,3,4)	Flexible Kit Extension - 10' (Includes Items 13 14 & Flexible Coupling 2ZDFC(2,3,4))
12	2ZDFBK(2,3,4)	Flexible Base Kit
13	2ZDFL(41,82)(2,3) or 2ZDFL(494,824)	Flexible Liner (41' or 49' or 82')
14	2ZDFS(2,3,4)	Flexible Spacer /Bracing Bracket (2 pieces)
15	2ZD2FLK(2,3,4)	Flexible Liner Kit (Includes Item 14 (5 pieces) & Chimney Cap with Flexible Connection)
16	2ZDCTV(24,35,46)	Concentric Termination Vertical
16a	2ZDRT(5,6,8)	Roof Termination
17	2ZDAF(2,4)	Adjustable Flashing 5°-25°
	2ZDAFM(2,4,8)	Adjustable Flashing 25°-45°
18	2ZDFF(2,4,5,8)	Flat Flashing
	2ZDCTAC(4,5,6)	Concentric Termination Air Cap
19	2ZDHK(2,3,4)	Horizontal Kit [Includes Items 1 (2ZDCPVC(2,3,4)), 3 20 21 2/ea of Items 1 3]
20	2ZDCTH(24,35,46)	Concentric Termination Horizontal
21	2ZDACLC(2224, 3335,4446)	Adaptor Collinear to Concentric
22	2ZDVK(2,3,4)	Vertical Kit [Includes Items 1 (2ZDCPVC(2,3,4)), 3 16 21; 2/ea of Items 1 3]
23	2ZDCE(24,35,46) (45,87)	Concentric Elbow 45° or 87°
24	2ZDCP(24,35,46) (12,24,36)	Concentric Pipe
	2ZDCAP(24,35,46)	Concentric Adjustable Pipe
25	2ZDTG(4,5,6)	Termination Guard
26	2ZDWPT(24,35,46) or 2ZDWP(4,5,6)	Wall Plate
27	2ZDGL	Gasket Lubricant - See Note 4

Notes:

1. Z-DENS is Intertek listed to ULC S636 for zero clearance to combustibles & maximum flue gas temperature of 230°F.
2. Z-DENS conforms to UL1738.
3. Support Z-DENS at: appliance adaptor, elbows, vertically every 78" & horizontally every: 39" (3" to 8") & 19" (2") along the length.
4. Use only Z-DENS Gasket Lubricant: 2ZDGL to ease assembly of joints, apply sparingly on leading edge of gasket.
5. Z-DENS is recyclable and environmentally friendly.
6. Z-DENS is warranted as a vent system unlike most PVC & CPVC.

*Consult appliance manufacturer's instructions for approved vent applications



Z-DENS Single Wall

Z-DENS is certified for use with condensing gas and oil fired heating appliances having flue gas temperatures up to 230°F (110°C).

Specifications

- Specially developed, fire retardant polypropylene
- ULC S636 certified for flue temperatures up to 230°F (110°C)
- Resistant up to a max flue temperature of 248°F (120°C)
- Cat II, IV Special Gas Vent
- Gas Vent BH, Class IIc
- Suitable for use with negative and positive pressure appliances
- Pressure tested to 20 inches W.C. (5000 pa, level H1)
- Available in appliance white finish in diameters 2" and 3"*
*UV stabilized parts available
- Available in UV stabilized grey finish in diameters 4", 5", 6" and 8"

Significant Advantages

- Vent system made from fire retardant polypropylene
- Long lasting and easy to install as no cure time is required
- Greater resistance to acidic flue gas condensate
- No leaching of chloride, as found in PVC and CPVC reducing boiler contaminates
- No primer or glue containing VOC's
- Environmentally friendly
- Recyclable and LEED compliant
- Non-toxic smoke or fumes if burned, compared to PVC and CPVC

Safety

All polypropylene material expands and contracts with temperature change. To ensure that the installation initially is and remains completely flue gas tight, it is necessary that the Z-DENS locking clamps and brackets are used. For the correct installation of the locking clamp and bracket, follow the instructions in the installation manual (download at www.z-flex.com). Only by following these instructions can Z-DENS guarantee a safe and flue gas tight installation. Use only Z-DENS lubricant when installing Z-DENS polypropylene to ensure a quick, reliable and safe connection.

Environment

During the production of polypropylene flue gas systems less CO₂ is produced than with the production of traditional metal flue gas systems.

Design Considerations

Greater system efficiencies and a more aesthetically pleasing installation can also be achieved by using Z-DENS Concentric.

Specification

Approved polypropylene vent manufacturers

Supplier	Model
Z-Flex U.S. Inc. 20 Commerce Park N, Bedford, NH, 03110 Ph. 800-654-5600	Z-DENS Single Wall, Flex, Concentric



Z-DENS Flex

The flexible polypropylene vent system is specifically designed for connection to condensing gas or oil fired heating appliances with a maximum flue temperature of 230°F (110°C)

Specifications:

- Made from fire retardant polypropylene
- Resistant up to max flue temperature of 248°F (120° C)
- Operates in negative and positive pressure modes
- Pressure tested to 20" WC (5000 pa, level H1)
- Chimney termination is UV resistant, flex is not UV resistant
- Designed as a vertical flue system installation but is safe to run at angles up to 45° from vertical
- Available in white

Simple installation is ensured because:

- Flexible pipe can be cut to length on site
- Coupling connectors allow easy joining of shorter lengths which can virtually eliminate waste
- Lightweight flue system for ease of installation
- Compact packaging due to its great flexibility
- Wide range of accessories


Installation

The installation manual of Z-DENS Flex shows just how simple it is to assemble and install the flexible vent system.

Z-DENS Flex installation instructions are available in the download section of our website at www.z-flex.com.

This flexible flue system is available in 3 diameters:

Nominal diameter	2" (Ø 60)	3" (Ø 80)	4" (Ø 110)
------------------	-----------	-----------	------------

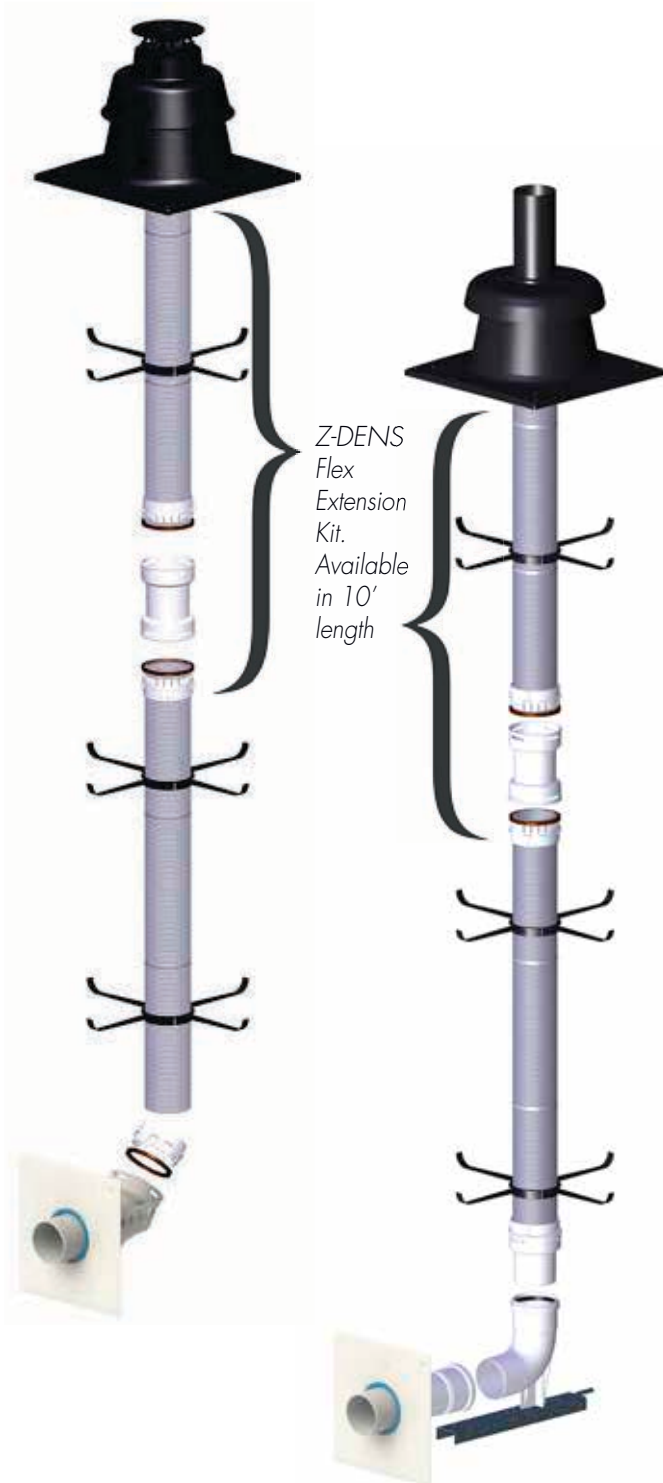

2" (60 mm)
3" (80 mm)

4" (110 mm)

Z-DENS Flex Chimney Kits

- Available in 25' & 35' lengths



Z-DENS Concentric

Z-DENS CONCENTRIC is precisely designed for use with condensing gas and oil heating appliances.

Certified to ULC S636 and CE Marked to European standards EN 1856-1 and EN 14471.

Z-DENS CONCENTRIC, through continuous improvement, is engineered for optimum performance.

The outer pipe is aluminum and the inner flue pipe is manufactured with fire retardant polypropylene.

(Please Note: Z-DENS CONCENTRIC can only be selected for use with high efficiency/condensing appliances.)

The inner pipe is centred in the outer pipe by the patented connection (Patent number: NL C 1022411). This system is available in concentric diameter sizes 2"/4" (60/100 mm), 3"/5" (80/125 mm) and 4"/6" (110/160 mm). Colour of outer pipe is white (RAL9016).

Significant Advantages

- The system is easy to assemble
- The system is particularly rigid
- It is modern in appearance
- The same system can be used indoors as well as outdoors
- Patent number: NL C 1022411
- Certified to ULC S636 Gas Vent-BH Class II C - 110°C/ 230°F
- CE Marked according the European standards EN 1856-1 and EN 14471



Z-DENS CONCENTRIC The Next Generation in Flue Systems

2"/4" | 3"/5" | 4"/6" (60/100 | 80/125 | 110/160 mm)

Z-DENS CONCENTRIC designed for use with condensing heating appliances. The system has an inner polypropylene flue outlet pipe which is centered in the outer aluminum air intake pipe by the patented CONNEX_T®-connection. The system is available in the nominal concentric measurements 2"/4", 3"/5" and 4"/6" (60/100, 80/125 and 110/160 mm), in the colour white (RAL 9016).

Vertical



Vertical Kit




Horizontal



Horizontal Kit



Additional Terminations

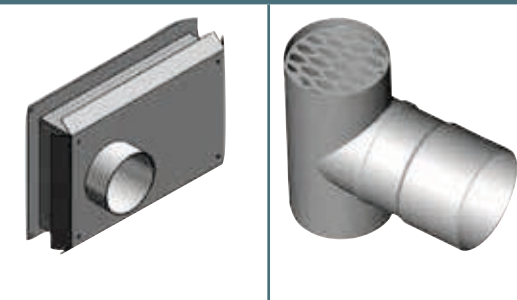

Z-DENS Concentric Terminations

Z-DENS CONCENTRIC TERMINATIONS are suitable for any condensing appliance. Designed with exceptional features including; modern appearance, outstanding aerodynamics, rain water management, cleaning and concentric or collinear (horizontal & vertical kit) options.

Vertical Design Features:

- Upper roof part is made of black RAL9005; UV resistant polypropylene for 2"/4" (60/100 mm) and 3"/5" (80/125 mm) or aluminum cap and galvanized outer air intake pipe for 4"/6" (110/160 mm)
- Outer air intake pipe below roof is made of white RAL 9016 galvanized steel
- Flue pipe is made of fire retardant polypropylene
- **Icicle-Free** - The cap allows some rain water to enter vent reducing icicle formation and aids in diluting PH of condensate
- **Aerodynamics** - Outstanding aerodynamic behaviour, with very low influence of wind

Horizontal Design Features:

- Outer wall part is made of grey RAL7001 UV resistant polypropylene for 2"/4" (60/100 mm) and 3"/5" (80/125 mm) or white RAL 9016 aluminum end and galvanized outer air intake pipe for 4"/6" (110/160 mm)
- Flue pipe is made of fire retardant polypropylene
- **Nozzle/Water Outlet** - The specially designed nozzle end prevents ingress of rain water. A collector with drip edge makes sure rain water and condensation are drained directly to the ground and not down the wall.
- **Aerodynamics** - Outstanding aerodynamic behaviour, with very low influence of wind
- **Removing/Cleaning** - The removal to clean nozzle end is simple, only a screw driver is needed

Z-DENS ADDITIONAL TERMINATIONS

- Z-DENS has additional UV resistant polypropylene terminations including; pipes, 45° and 90° elbows all for use with stainless steel end screens.
- Z-DENS has additional stainless steel terminations including: tees with built in screens and horizontal low profile kits.

Z-DENS 2" Single Wall Rigid

Polypropylene Vent System for High Efficiency Condensing Appliances

Image	Part ID	Description
	2ZDCPVC2	Z-DENS Adaptor 2" CPVC/PVC Coupling to 2" (60 mm) Z-DENS L = 4" L ₁ = 2.5" - Stainless Steel
	2ZDCPVCG2	Z-DENS Adaptor - Appliance with Gasket & Clamp - 2" CPVC/PVC to 2" (60 mm) Z-DENS L = 4" L ₁ = 2.5" - Stainless Steel
	2ZDTA42	Z-DENS Adaptor - Takagi T-H3-DV/140-540 to 2" (60 mm) Z-DENS L ₁ = 7.7" - Stainless Steel
	2ZDP212	Z-DENS Pipe 2" (60 mm) L = 12" L ₁ = 10.2" White
	2ZDP212UV	Z-DENS Pipe 2" (60 mm) L = 12" L ₁ = 10.2" UV-Black
	2ZDP224	Z-DENS Pipe 2" (60 mm) L = 24" L ₁ = 22.2" White
	2ZDP224UV	Z-DENS Pipe 2" (60 mm) L = 24" L ₁ = 22.2" UV-Black
	2ZDP236	Z-DENS Pipe 2" (60 mm) L = 36" L ₁ = 34.2" White
	2ZDP236UV	Z-DENS Pipe 2" (60 mm) L = 36" L ₁ = 34.2" UV-Black
	2ZDP272	Z-DENS Pipe 2" (60 mm) L = 72" L ₁ = 70.2" White
	2ZDAP2	Z-DENS Adjustable Pipe 2" (60 mm) L = 2.6" to 8.3" White
	2ZDTP2	Z-DENS Test Port 2" (60 mm) L = 7" L ₁ = 5.1" White
	2ZDE245	Z-DENS Elbow 2" (60 mm) 45° L ₁ = 2.8" L ₃ = 3.2" White
	2ZDE245UV	Z-DENS Elbow 2" (60 mm) 45° L ₁ = 2.8" L ₃ = 3.2" UV- Black
	2ZDE287	Z-DENS Elbow 2" (60 mm) 87° L ₁ = 4.3" L ₃ = 4.7" White
	2ZDE287UV	Z-DENS Elbow 2" (60 mm) 87° L ₁ = 4.3" L ₃ = 4.7" UV- Black

Product Catalogue & Dimensional Data
Z-DENS 2" Single Wall Rigid
Polypropylene Vent System for High Efficiency Condensing Appliances





Image	Part ID	Description
	2ZDCD2	Z-DENS Condensate Drain 2" (60 mm) L = 5.9" L ₁ = 4.1" Horizontal/Vertical - White
	2ZDCT	Z-DENS Condensate Trap
	2ZDI23	Z-DENS Increaser 2" to 3" (60 to 80 mm) L = 5.3" L ₁ = 3.5" Eccentric - White
	2ZDR32	Z-DENS Reducer 3" to 2" (80 to 60 mm) L = 5.3" L ₁ = 3.5" Concentric - White
	2SVSLSF02	Z-DENS Storm Collar 2" (60 mm) - Stainless Steel
	2SVSSCF02	Z-DENS Flat Flashing 2" (60 mm), 0° - 5°
	2SVSADJF02	Z-DENS Adjustable Flashing 2" (60 mm), 0° - 30°
	2ZDES2	Z-DENS End Screen 2" (60 mm) - Stainless Steel
	2ZDTT2	Z-DENS Termination Tee with Screen 2" (60 mm) - Stainless Steel
	2ZDHKLP2	Z-DENS Horizontal Kit Low Profile for 2" CPVC/PVC & 2" (60 mm) Z-DENS - Stainless Steel

Z-DENS 2" Single Wall Rigid

Polypropylene Vent System for High Efficiency Condensing Appliances

Image	Part ID	Description
	2ZDHK2	Z-DENS Horizontal Kit 2" (60 mm) (Concentric Termination Horizontal, Adaptor Collinear to Concentric, 2 locking clamps & 2 Adaptors CPVC/PVC Coupling to PP)
(60/100 mm) with length L indicated." data-bbox="90 225 205 285"/>	2ZDCTH24	Z-DENS Concentric Termination Horizontal 2"/4" (60/100 mm) L = 31.5"
	2ZDVK2	Z-DENS Vertical Kit 2" (60 mm) (Concentric Termination Vertical, Adaptor Collinear to Concentric, 2 locking clamps & 2 Adaptors CPVC/PVC Coupling to PP)
(60/100 mm) with dimensions H1 and H2 indicated." data-bbox="90 400 155 515"/>	2ZDCTV24	Z-DENS Concentric Termination Vertical 2"/4" (60/100 mm) H ₁ = 21.4" H ₂ = 45.3"
	2ZDACLC2224	Z-DENS Adaptor Collinear to Concentric 2" - 2" to 2"/4" (60 mm to 60/100 mm) L ₁ = 4.1"
	2ZDCTAC4	Z-DENS Concentric Termination Air Cap 4" (100 mm)
(60/100 mm) or 3"/5" (80/125 mm), 0°, H = 4"." data-bbox="75 655 195 695"/>	2ZDFF2	Z-DENS Flat Flashing 2"/4" (60/100 mm) or 3"/5" (80/125 mm), 0°, H = 4"
(60/100 mm) or 3"/5" (80/125 mm), 5° - 25°." data-bbox="75 715 195 775"/>	2ZDAF2	Z-DENS Adjustable Flashing (Small) 2"/4" (60/100 mm) or 3"/5" (80/125 mm), 5° - 25°
(60/100 mm) or 3"/5" (80/125mm) 25° - 45°." data-bbox="75 800 195 865"/>	2ZDAFM2	Z-DENS Adjustable Flashing Medium 2"/4" (60/100 mm) or 3"/5" (80/125mm) 25° - 45°

Product Catalogue & Dimensional Data
Z-DENS 2" Single Wall Rigid
 Polypropylene Vent System for High Efficiency Condensing Appliances

Image	Part ID	Description
	2SVSGB02	Z-DENS Guy Band 2" (60 mm) - Stainless Steel
	2ZDLC2	Z-DENS Locking Clamp 2" (60 mm)
	2ZDFB2	Z-DENS Fixing Bracket/Support Clamp (with Rubber Lining) 2" (60 mm)
" data-bbox="90 350 175 400"/>	2ZDWPT24	Z-DENS Wall Plate Termination SUPPORT 2"/>" data-bbox="90 350 175 400"/>
	2ZDWPB2	Z-DENS Wall Plate Black 2" (60 mm) EPDM
	2ZDGL	Z-DENS Gasket Lubricant
	2ZDG2	Z-DENS Gasket 2" (60 mm) - Replacement Rigid or Concentric-Black EPDM
	2ZDG2V	Z-DENS Gasket 2" (60 mm) Replacement Rigid or Concentric Red/Brown FKM (Viton®)

Z-DENS 2" Flexible

Polypropylene Vent System for High Efficiency Condensing Appliances

Image	Part ID	Description
	2ZDFK225	Z-DENS Flexible Kit - Chimney 2" (60 mm) x 25 ft.
	2ZDFK235	Z-DENS Flexible Kit - Chimney 2" (60 mm) x 35 ft.
	2ZDFKX2	Z-DENS Flexible Kit Extension 2" (60 mm) x 10 ft. (Flexible Liner, Flexible Coupling & 2 Flexible Spacers)
	2ZD2FLK2	Z-DENS Flexible Liner Kit 2" (60 mm) (Chimney Cap, Flexible Connection, 5 Flexible Spacers & Hardware)
	2ZDFL412	Z-DENS Flexible Liner 2" (60 mm) L = 41 ft.
	2ZDFL822	Z-DENS Flexible Liner 2" (60 mm) L = 82 ft.
	2ZDFS2	Z-DENS Flexible Spacer /Bracing Bracket 2" (60 mm) (2 pieces)
	2ZDFBK2	Z-DENS Flexible Base Kit 2" (60 mm) L ₁ = 6.9" L ₃ = 2.3" (B2)
	2ZDFBCL2	Z-DENS Flexible Base to Collinear 2" (60 mm) L ₁ = 9.8" L ₃ = 1.5" - Ventilated Chimney Air (C9)
	2ZDFBC2	Z-DENS Flexible Base to Concentric 2" to 2"/4" (60 to 60/100 mm) L ₁ = 8.6" L ₃ = 0.5" - Room Air (B3)
	2ZDFBC224	Z-DENS Flexible Base to Concentric 2" to 2"/4" (60 to 60/100 mm) L ₁ = 8.6" L ₃ = 0.5" - Ventilated Chimney Air (C9x)
	2ZDRCC2	Z-DENS Round Chimney Cover 2" (60 mm) to 4" or 5" B-Vent

Product Catalogue & Dimensional Data
Z-DENS 2" Flexible
 Polypropylene Vent System for High Efficiency Condensing Appliances

Image	Part ID	Description
	2ZD5BV2	Z-DENS Cap 5" B-Vent to 2" PP or PVC/CPVC
	2ZDCPS2	Z-DENS Flexible Ceiling Plate 2" (60 mm) L ₁ = 2.6" (B2)
	2ZDCPC2	Z-DENS Flexible Ceiling Plate to Concentric 2" to 2"/4" (60 to 60/100 mm) L ₁ = 2.6" Ventilated Chimney Air (C9x)
	2ZDCPCT2	Z-DENS Flexible Ceiling Plate to Concentric Telescopic 2" to 2"/4" (60 to 60/100 mm) L ₁ = 10.6" Ventilated Chimney Air (C9x)
	2ZDFC2	Z-DENS Flexible Coupling 2" (60 mm) L ₁ = 2.9"
	2ZDFFA2	Z-DENS (Rigid) Female to Flexible Adaptor 2" (60 mm) L ₁ = 3"
	2ZDFRA2	Z-DENS Flexible to Rigid (Male) Adaptor 2" (60 mm) L ₁ = 2.6"
	2ZDFIT2	Z-DENS Flexible Installation Tool 2" (60 mm)
	2ZDGL	Z-DENS Gasket Lubricant
	2ZDFG2	Z-DENS Flexible Gasket 2" (60 mm) Replacement - Red/Brown FKM (Viton®)

Z-DENS 3" Single Wall Rigid

Polypropylene Vent System for High Efficiency Condensing Appliances

Image	Part ID	Description
	2ZDCPVC3	Z-DENS Adaptor 3" CPVC/PVC Coupling to 3" (80 mm) Z-DENS L = 7.3" L ₁ = 6.3" - Stainless Steel
	2ZDCPVCG3	Z-DENS Adaptor - Appliance with Gasket & Clamp 3" CPVC/PVC to 3" (80 mm) Z-DENS L = 7.3" L ₁ = 6.3" - Stainless Steel
	2ZDCPVCG3L	Z-DENS Adaptor - Appliance with Gasket & Clamp 3" CPVC/PVC to 3" (80 mm) Z-DENS L = 16.2" L ₁ = 15.2" - Stainless Steel
	2ZDCPVCS3	Z-DENS Adaptor - Appliance with Seal 3" CPVC/PVC to 3" (80 mm) Z-DENS L = 7.3" L ₁ = 6.3" - Stainless Steel
	2ZDCPVCF3	Z-DENS Adaptor 3" CPVC/PVC Pipe to 3" (80 mm) Z-DENS L = 5.8" L ₁ = 2.5" - Stainless Steel
	2ZDTA43	Z-DENS Adaptor Takagi T-H3-DV/140-150 to 3" (80 mm) Z-DENS L = 5.7" L ₁ = 4.2" - Stainless Steel
	2ZDZV3	Z-DENS Adaptor 3" Z-Vent to 3" (80 mm) Z-DENS L = 5.8" L ₁ = 4.5" - Stainless Steel
	2ZDP312	Z-DENS Pipe 3" (80 mm) L = 12" L ₁ = 10.2" White
	2ZDP312UV	Z-DENS Pipe 3" (80 mm) L = 12" L ₁ = 10.2" UV-Black
	2ZDP324	Z-DENS Pipe 3" (80 mm) L = 24" L ₁ = 22.2" White
	2ZDP324UV	Z-DENS Pipe 3" (80 mm) L = 24" L ₁ = 22.2" UV-Black
	2ZDP336	Z-DENS Pipe 3" (80 mm) L = 36" L ₁ = 34.2" White
	2ZDP336UV	Z-DENS Pipe 3" (80 mm) L = 36" L ₁ = 34.2" UV-Black
	2ZDP372	Z-DENS Pipe 3" (80 mm) L = 72" L ₁ = 70.2" White
 <i>Unique Item</i>	2ZDAP3	Z-DENS Adjustable Pipe 3" (80 mm) L = 2.4" to 8.3" White
	2ZDTP3	Z-DENS Test Port 3" (80 mm) L = 10" L ₁ = 8.1" White
	2ZDE345	Z-DENS Elbow 3" (80 mm) 45° L ₁ = 3.5" L ₃ = 3.5" White
	2ZDE345UV	Z-DENS Elbow 3" (80 mm) 45° L ₁ = 3.5" L ₃ = 3.5" UV-Black
	2ZDE387	Z-DENS Elbow 3" (80 mm) 87° L ₁ = 4.7" L ₃ = 5.1" White
	2ZDE387UV	Z-DENS Elbow 3" (80 mm) 87° L ₁ = 4.7" L ₃ = 5.1" UV-Black

Product Catalogue & Dimensional Data
Z-DENS 3" Single Wall Rigid
 Polypropylene Vent System for High Efficiency Condensing Appliances








Image	Part ID	Description
	2ZDCD3	Z-DENS Condensate Drain 3" (80 mm) L = 6.3" L ₁ = 4.5" Horizontal/Vertical White
	2ZDCT	Z-DENS Condensate Trap
	2ZDI34	Z-DENS Increaser 3" to 4" (80 to 110 mm) L = 5.5" L ₁ = 3.7" Eccentric - White
	2ZDR43	Z-DENS Reducer 4" to 3" (110 to 80 mm) L = 6" L ₁ = 4.3" Eccentric
	2SVSLSF03	Z-DENS Storm Collar 3" (80 mm) - Stainless Steel
	2SVSSCF03	Z-DENS Flat Flashing 3" (80 mm), 0° - 5°
	2SVSADJF03	Z-DENS Adjustable Flashing 3" (80 mm), 0° - 30°
	2ZDES3	Z-DENS End Screen 3" (80 mm) Stainless Steel
	2ZDTT3	Z-DENS Termination Tee with Screen 3" (80 mm) - Stainless Steel
	2ZDHLKP3	Z-DENS Horizontal Kit Low Profile for 3" CPVC/PVC & 3" (80 mm) Z-DENS - Stainless Steel

Z-DENS 3" Single Wall Rigid

Polypropylene Vent System for High Efficiency Condensing Appliances

Image	Part ID	Description
	2ZDHK3	Z-DENS Horizontal Kit 3" (80 mm) (Concentric Termination Horizontal, Adaptor Collinear to Concentric, 2 locking clamps & 2 Adaptors CPVC/PVC Coupling to PP)
(5" (80/125mm) L = 30.9" with dimension L indicated." data-bbox="75 225 190 285"/>	2ZDCTH35	Z-DENS Concentric Termination Horizontal 3"/>(5" (80/125mm) L = 30.9"
	2ZDVK3	Z-DENS Vertical Kit 3" (80 mm) (Concentric Termination Vertical, Adaptor Collinear to Concentric, 2 locking clamps & 2 Adaptors CPVC/PVC Coupling to PP)
(5" (80/125 mm) with dimensions H1 = 21.7" and H2 = 45.6" indicated." data-bbox="85 425 160 555"/>	2ZDCTV35	Z-DENS Concentric Termination Vertical 3"/>(5" (80/125 mm) H ₁ = 21.7" H ₂ = 45.6"
(5" (8 mm to 80/125 mm) L1 = 5.1" component." data-bbox="85 570 165 625"/>	2ZDACLC3335	Z-DENS Adaptor Collinear to Concentric 3" - 3" to 3"/>(5" (8 mm to 80/125 mm) L ₁ = 5.1"
	2ZDCTAC5	Z-DENS Concentric Termination Air Cap 5" (125 mm)
(4" (60/100 mm) or 3"/>(5" (80/125 mm) 0°, H = 4" component." data-bbox="65 690 185 730"/>	2ZDFF2	Z-DENS Flat Flashing 2"/>(4" (60/100 mm) or 3"/>(5" (80/125 mm) 0°, H = 4"
(4" (60/100 mm) or 3"/>(5" (80/125 mm) 5° - 25° component." data-bbox="75 740 185 795"/>	2ZDAF2	Z-DENS Adjustable Flashing (Small) 2"/>(4" (60/100 mm) or 3"/>(5" (80/125 mm), 5° - 25°
(4" (60/100 mm) or 3"/>(5" (80/125mm) 25° - 45° component." data-bbox="75 810 185 865"/>	2ZDAFM2	Z-DENS Adjustable Flashing Medium 2"/>(4" (60/100 mm) or 3"/>(5" (80/125mm), 25° - 45°

Product Catalogue & Dimensional Data
Z-DENS 3" Single Wall Rigid
 Polypropylene Vent System for High Efficiency Condensing Appliances

Image	Part ID	Description
	2SVSGB03	Z-DENS Guy Band 3" (80 mm) - Stainless Steel
	2ZDLC3	Z-DENS Locking Clamp 3" (80 mm)
	2ZDFB3	Z-DENS Fixing Bracket /Support Clamp (with Rubber Lining) 3" (80 mm)
" data-bbox="78 358 158 411"/>	2ZDWPT35	Z-DENS Wall Plate Termination SUPPORT 3"/>" data-bbox="78 358 158 411"/>
	2ZDWPB3	Z-DENS Wall Plate Black 3" (80 mm) EPDM
	2ZDGL	Z-DENS Gasket Lubricant
	2ZDG3	Z-DENS Gasket 3" (80 mm) Replacement Rigid or Concentric Black EPDM
	2ZDG3V	Z-DENS Gasket 3" (80 mm) Replacement Rigid or Concentric Red/Brown FKM (Viton®)

Z-DENS 3" Flexible

Polypropylene Vent System for High Efficiency Condensing Appliances

Image	Part ID	Description
	2ZDFK325	Z-DENS Flexible Kit - Chimney 3" (80 mm) x 25 ft.
	2ZDFK335	Z-DENS Flexible Kit - Chimney 3" (80 mm) x 35 ft.
	2ZDFKX3	Z-DENS Flexible Kit Extension 3" (80 mm) x 10 ft. (Flexible Liner, Flexible Coupling & Flexible Spacers)
	2ZD2FLK3	Z-DENS Flexible Chimney Liner Kit 3" (80 mm) (Chimney Cap, Flexible Connection, 5 Flexible Spacers & Hardware)
	2ZDFL413	Z-DENS Flexible Liner 3" (80 mm) L = 41 ft.
	2ZDFL823	Z-DENS Flexible Liner 3" (80 mm) L = 82 ft.
	2ZDFS3	Z-DENS Flexible Spacer / Bracing Bracket 3" (80 mm) (2 pieces)
	2ZDFBK3	Z-DENS Flexible Base Kit 3" (80 mm) $L_1 = 7.3"$ $L_3 = 0.5"$ (B2)
	2ZDFBCL3	Z-DENS Flexible Base to Collinear 3" (80 mm) $L_1 = 9.5"$ $L_3 = 0.8"$ - Ventilated Chimney Air (C9)
	2ZDFBC3	Z-DENS Flexible Base to Concentric 3" to 3"/5" (80 to 80/125 mm) $L_1 = 9.5"$ $L_3 = 0.5"$ - Room Air (B3)
	2ZDFBC335	Z-DENS Flexible Base to Concentric 3" to 3"/5" (80 to 80/125 mm) $L_1 = 7.3"$ $L_3 = 0.5"$ - Ventilated Chimney Air (C9x)

Product Catalogue & Dimensional Data
Z-DENS 3" Flexible
 Polypropylene Vent System for High Efficiency Condensing Appliances

Image	Part ID	Description
	2ZDRCC3	Z-DENS Round Chimney Cover 3" (80 mm) to 5" or 6" B-Vent
	2ZD6BV3	Z-DENS Cap 6" B-Vent to 3"PP or PVC/CPVC
	2ZDCPS3	Z-DENS Flexible Ceiling Plate 3" (80 mm) L ₁ = 4.7" (B2)
	2ZDCPC3	Z-DENS Flexible Ceiling Plate to Concentric 3" to 3"/5" (80 to 80/125 mm) L ₁ = 4.7" - Ventilated Chimney Air (C9x)
	2ZDCPCT3	Z-DENS Flexible Ceiling Plate Concentric Telescopic 3" to 3"/5" (80 to 80/125 mm) L ₁ = 12.8" - Ventilated Chimney Air (C9x)
	2ZDFC3	Z-DENS Flexible Coupling 3" (80 mm) L ₁ = 2.8"
	2ZDFFA3	Z-DENS (Rigid) Female to Flexible Adaptor 3" (80mm) L ₁ = 3.1"
	2ZDFRA3	Z-DENS Flexible to Rigid (Male) Adaptor 3" (80 mm) L ₁ = 2.7"
	2ZDFIT3	Z-DENS Flexible Installation Tool 3" (80 mm)
	2ZDGL	Z-DENS Gasket Lubricant
	2ZDFG3	Z-DENS Flexible Gasket 3" (80 mm) Replacement - Red/Brown FKM (Viton®)

Z-DENS 4" Single Wall Rigid

Polypropylene Vent System for High Efficiency Condensing Appliances

Image	Part ID	Description
	2ZDCPVC4	Z-DENS Adaptor 4" CPVC/PVC Coupling to 4" (110 mm) Z-DENS L = 7.3" L ₁ = 6" - Stainless Steel
	2ZDCPVCG4	Z-DENS Adaptor Appliance with Gasket & Clamp - 4" CPVC/PVC to 4" (110 mm) Z-DENS L = 7.3" L ₁ = 6" - Stainless Steel
	2ZDIBC4	Z-DENS Adapter IBC SL 4" to 4" (110 mm) Z-DENS L = 6.5" L ₁ = 3.7" - Stainless Steel
	2ZDCPVCS4	Z-DENS Adaptor - Appliance with Seal 4" CPVC/PVC to 4" (110 mm) Z-DENS L = 7.3" L ₁ = 6" - Stainless Steel
	2ZDCPVCF4	Z-DENS Adaptor 4" CPVC/PVC Pipe to 4" (110 mm) Z-DENS L = 6.8" L ₁ = 3.3" - Stainless Steel
	2ZDTA4	Z-DENS Adaptor Takagi T-H3-DV/140-540 to 4" (110 mm) Z-DENS L = 6.8" L ₁ = 5.3" - Stainless Steel
	2ZDZV4	Z-DENS Adaptor 4" Z-Vent to 4" (110 mm) Z-DENS L = 5" L ₁ = 3.6" - Stainless Steel
	2ZDP412	Z-DENS Pipe 4" (110 mm) L = 12" L ₁ = 10" UV-Grey
	2ZDP424	Z-DENS Pipe 4" (110 mm) L = 24" L ₁ = 22" UV-Grey
	2ZDP436	Z-DENS Pipe 4" (110 mm) L = 36" L ₁ = 34" UV-Grey
	2ZDP472	Z-DENS Pipe 4" (110 mm) L = 72" L ₁ = 70" UV-Grey
	2ZDAP4	Z-DENS Adjustable Pipe 4" (110 mm) L = 3.2" to 8.3" - UV-Grey
	2ZDTP4	Z-DENS Test Port 4" (110 mm) L = 8.7" L ₁ = 6.7" - UV-Grey
	2ZDE445UV	Z-DENS Elbow 4" (110 mm) 45° L ₁ = 3.3" L ₃ = 3.5" UV-Grey
	2ZDE487UV	Z-DENS Elbow 4" (110 mm) 87° L ₁ = 4.3" L ₃ = 4.7" UV-Grey
	2ZDCD4	Z-DENS Condensate Drain 4" (110 mm) L = 8.7" L ₁ = 6.7" Horizontal

Product Catalogue & Dimensional Data
Z-DENS 4" Single Wall Rigid
Polypropylene Vent System for High Efficiency Condensing Appliances

Image	Part ID	Description
	2ZDCT	Z-DENS Condensate Trap
	2ZDI44	Z-DENS Increaser 4" (100 to 110 mm) L = 6.3" L ₁ = 4.3" Concentric
	2ZDI46	Z-DENS Increaser 4" to 6" (110 to 160 mm) L = 12.5" L ₁ = 10.6" Concentric - Stainless Steel
 Unique Item	2SVSLSF04	Z-DENS Storm Collar 4" (110 mm) - Stainless Steel
 Unique Item	2SVSSCF04	Z-DENS Flat Flashing 4" (110 mm), 0° - 5°
 Unique Item	2SVSADJF04	Z-DENS Adjustable Flashing 4" (110 mm), 0° - 30°
	2ZDES4	Z-DENS End Screen 4" (110 mm) - Stainless Steel
	2ZDTT4	Z-DENS Termination Tee with screen 4" (110 mm) - Stainless Steel
 Unique Item	2ZDHLKP4	Z-DENS Horizontal Kit Low Profile for 4" CPVC/PVC and 4" (110 mm) Z-DENS - Stainless Steel
 Unique Item	2ZDHK4	Z-DENS Horizontal Kit 4" (110 mm) (Concentric Termination Horizontal, Adaptor Collinear to Concentric, 2 locking clamps & 2 Adaptors CPVC/ PVC Coupling to PP)

Z-DENS 4" Single Wall Rigid

Polypropylene Vent System for High Efficiency Condensing Appliances

Image	Part ID	Description
	2ZDCTH46	Z-DENS Concentric Termination Horizontal 4"/6" (110/160 mm) L = 27"
	2ZDVK4	Z-DENS Vertical Kit 4" (110 mm) (Concentric Termination Vertical, Adaptor Collinear to Concentric, 2 locking clamps & 2 Adaptors CPVC/PVC Coupling to PP)
	2ZDCTV46	Z-DENS Concentric Termination Vertical 4"/6" (110/160 mm) H ₁ = 30.9" H ₂ = 47"
	2ZDACLC4446	Z-DENS Adaptor Collinear to Concentric 4" - 4" to 4"/6" (110 mm to 110/160 mm) L ₁ = 7.8"
	2ZDCTAC6	Z-DENS Concentric Termination Air Cap 6" (160 mm)
	2ZDFF4	Z-DENS Flat Flashing 4"/6" (110/160 mm) or 6" (160 mm), 0°, H = 6"
	2ZDAF4	Z-DENS Adjustable Flashing (Small) 4"/6" (110/160 mm), 5° - 25°
	2ZDAFM4	Z-DENS Adjustable Flashing Medium 4"/6" (110/160 mm) 25° - 45°

Product Catalogue & Dimensional Data
Z-DENS 4" Single Wall Rigid
Polypropylene Vent System for High Efficiency Condensing Appliances





Image	Part ID	Description
	2SVSGB04	Z-DENS Guy Band 4" (110 mm) - Stainless Steel
	2ZDLC4	Z-DENS Locking Clamp 4" (110 mm)
	2ZDFB4	Z-DENS Fixing Bracket/Support Clamp (with Rubber Lining) 4" (110 mm)
	2ZDWPT46	Z-DENS Wall Plate Termination SUPPORT 4"/6" (110/160 mm) Aluminum-White
	2ZDGL	Z-DENS Gasket Lubricant
	2ZDG4	Z-DENS Gasket 4" (110 mm) Replacement Rigid or Concentric - Black EPDM
	2ZDG4V	Z-DENS Gasket 4" (110 mm) Replacement Rigid or Concentric - Red/Brown FKM (Viton®)

Z-DENS 4" Flexible

Polypropylene Vent System for High Efficiency Condensing Appliances

Image	Part ID	Description
	2ZDFK425	Z-DENS Flexible Kit Chimney 4" (110 mm) x 25 ft. Includes Wall Plate and Flexible Connections
	2ZDFK435	Z-DENS Flexible Kit Chimney 4" (110 mm) x 35 ft. Includes Wall Plate and Flexible Connections
	2ZDFKX4	Z-DENS Flexible Kit Extension 4" (110 mm) x 10 ft. (Flexible Liner, Flexible Coupling & 2 Flexible Spacers)
	2ZD2FLK4	Z-DENS Flexible Liner Kit 4" (110 mm) (Chimney Cap, Flexible Connection, 5 Flexible Spacers & Hardware)
	2ZDFL494	Z-DENS Flexible Liner 4" (110 mm) L = 49 ft.
	2ZDFL824	Z-DENS Flexible Liner 4" (110 mm) L = 82 ft.
	2ZDFS4	Z-DENS Flexible Spacer/Bracing Bracket 4" (110 mm)
	2ZDFBK4	Z-DENS Flexible Base Kit 4" (110 mm) Includes Wall Plate and Flexible Connection $L_1 = 4.3"$ $L_3 = 6.3"$
	2ZDFC4	Z-DENS Flexible Coupling 4" (110 mm) $L_1 = 2.7"$
	2ZDFFA4	Z-DENS (Rigid) Female to Flexible Adaptor 4" (110 mm) $L_1 = 2.9"$

Product Catalogue & Dimensional Data
Z-DENS 4" Flexible
 Polypropylene Vent System for High Efficiency Condensing Appliances

Image	Part ID	Description
	2ZDFRA4	Z-DENS Flexible to Rigid (Male) Adaptor 4" (110 mm) L ₁ = 2.5"
	2ZDFIT4	Z-DENS Flexible Installation Tool 4" (110 mm)
	2ZDGL	Z-DENS Gasket Lubricant
	2ZDFG4	Z-DENS Flexible Gasket 4" (110 mm) Replacement - Red/Brown FKM (Viton®)

Z-DENS 5" Single Wall Rigid - SPECIAL ORDER

Polypropylene Vent System for High Efficiency Condensing Appliances

Image	Part ID	Description
	2ZDP524	Z-DENS Pipe 5" (125 mm) L = 24" L ₁ = 21.7" UV-Grey
	2ZDP536	Z-DENS Pipe 5" (125 mm) L = 36" L ₁ = 33.7" UV-Grey
	2ZDP572	Z-DENS Pipe 5" (125 mm) L = 72" L ₁ = 69.7" UV-Grey
	2ZDTP5	Z-DENS Test Port 5" (125 mm) L = 8.7" L ₁ = 6.4" UV-Grey
	2ZDE545	Z-DENS Elbow 5" (125 mm) 45° L ₁ = 3.9" L ₃ = 3.9" UV-Grey
	2ZDE587	Z-DENS Elbow 5" (125 mm) 87° L ₁ = 5.8" L ₃ = 5.7" UV-Grey
	2ZDCD5H	Z-DENS Condensate Drain 5" (125 mm) L = 8.7" L ₁ = 6.4" Horizontal
	2ZDCT	Z-DENS Condensate Trap
	2ZDI45	Z-DENS Increaser 4" to 5" (110 to 125 mm) L = 7" L ₁ = 4.8" Eccentric
	2ZDI56	Z-DENS Increaser 5" to 6" (125 mm to 160 mm) L = 8.3" L ₁ = 5.7" Eccentric
	2ZDR65	Z-DENS Reducer 6" to 5" (160 to 125 mm) L = 7.1" L ₁ = 4.8" Eccentric

Product Catalogue & Dimensional Data
Z-DENS 5" Single Wall Rigid - SPECIAL ORDER
 Polypropylene Vent System for High Efficiency Condensing Appliances

Image	Part ID	Description
	2ZDR54	Z-DENS Reducer 5" to 4" (125 to 110 mm) L = 5.5" L ₁ = 3.5" Eccentric
 	2SVSLS05	Z-DENS Storm Collar 5" (125 mm) - Stainless Steel
 	2SVSF05	Z-DENS Flat Flashing 5" (125 mm), 0° - 5°
 	2SVSFA05	Z-DENS Adjustable Flashing 5" (125 mm), 0° - 30°
	2ZDES5	Z-DENS End Screen 5" (125 mm) Stainless Steel
	2ZDTT5	Z-DENS Termination Tee with Screen 5" (125 mm) Stainless Steel
	2ZDCC5	Z-DENS Chimney Cover 5" (125 mm)
 	2ZDRT5	Z-DENS Roof Terminal 5" (125 mm) H ₁ = 34" H ₂ = 59" with Bracket PPs/ Galvanized-Black
	2ZDFF5	Z-DENS Flat Flashing 5" (125 mm) 0°, H = 4"
 	2SVSGB05	Z-DENS Guy Band 5" (125 mm) - Stainless Steel
	2ZDLC5	Z-DENS Locking Clamp 5" (125 mm)
	2ZDFB5	Z-DENS Fixing Bracket/Support Clamp (with Rubber Lining) 5" (125 mm)
	2ZDGL	Z-DENS Gasket Lubricant
	2ZDG5	Z-DENS Gasket 5" (125 mm) Replacement Single Wall Rigid - Black EPDM
	2ZDG5V	Z-DENS Gasket 5" (125 mm) Replacement Single Wall Rigid Red/Brown FKM(Viton®)

Z-DENS 6" Single Wall Rigid

Polypropylene Vent System for High Efficiency Condensing Appliances

Image	Part ID	Description
	2ZDCPVC6	Z-DENS Adaptor 6" CPVC/PVC Coupling to 6" (160 mm) Z-DENS L = 11.2" L ₁ = 9.3" - Stainless Steel
	2ZDCPVCG6	Z-DENS Adaptor Appliance with Gasket & Clamp 6" CPVC/PVC to 6" (160 mm) Z-DENS L = 11.2" L ₁ = 9.3" - Stainless Steel
	2ZDCPVCF6	Z-DENS Adaptor 6" CPVC/PVC Pipe to 6" (160 mm) Z-DENS L = 12.9" L ₁ = 9.5" - Stainless Steel
	2ZDZV6	Z-DENS Adaptor 6" Z-Vent to 6" (160 mm) Z-DENS L = 6.8" L ₁ = 4.8" - Stainless Steel
	2ZDLAMT06	Z-DENS Adaptor - Laars MagnaTherm MGTH/V 1600 to 6" (160 mm) Z-DENS L = 8" L ₁ = 6" - Stainless Steel
	2ZDWASF1006	Z-DENS Adaptor - Weil McLain Slim Fit (SF1000) 10" to 6" (160 mm) Z-DENS L = 13.9" L ₁ = 11.3" - Stainless Steel
	2ZDAEDR6	Z-DENS Adaptor with High Temperature RTV Tube - Fulton Endura 6" to 6" (160mm) Z-DENS L = 6.5" L ₁ = 4.3" - Stainless Steel
	2ZDAABM06	Z-DENS Adaptor with Viton® Gasket - Aerco Benchmark (BMK750/1000/1500) 6" to 6" (160 mm) Z-DENS L = 11.8" L ₁ = 9.3" - Stainless Steel
	2ZDP624	Z-DENS Pipe 6" (160 mm) L = 24" L ₁ = 21.5" UV-Grey
	2ZDP636	Z-DENS Pipe 6" (160 mm) L = 36" L ₁ = 33.4" UV-Grey
	2ZDP672	Z-DENS Pipe 6" (160 mm) L = 72" L ₁ = 69.5" UV-Grey

Product Catalogue & Dimensional Data
Z-DENS 6" Single Wall Rigid
Polypropylene Vent System for High Efficiency Condensing Appliances

Image	Part ID	Description
	2ZDTP6	Z-DENS Test Port 6" (160 mm) L = 9" L ₁ = 6.5"
	2ZDE645	Z-DENS Elbow 6" (160 mm) 45° L ₁ = 4.6" L ₃ = 4.5" UV-Grey
	2ZDE687	Z-DENS Elbow 6" (160 mm) 87° L ₁ = 6.4" L ₃ = 6.3" UV-Grey
	2ZDCD6H	Z-DENS Condensate Drain 6" (160 mm) L = 9" L ₁ = 6.5" Horizontal
	2ZDCT	Z-DENS Condensate Trap
	2ZDA6	Z-DENS Adaptor 6" (150 mm to 160 mm) L = 7.3" L ₁ = 4.7" Concentric
	2ZDI68	Z-DENS Increaser 6" to 8" (160 to 200 mm) L = 12.2" L ₁ = 7.9" Eccentric
	2ZDR64	Z-DENS Reducer 6" to 4" (160 to 110 mm) L = 12.5" L ₁ = 11.1" Concentric - Stainless Steel
	2ZDR86	Z-DENS Reducer 8" to 6" (200 to 160 mm) L = 10.6" L ₁ = 8.1" Eccentric
	2SVSLS06	Z-DENS Storm Collar 6" (160 mm) - Stainless Steel
	2SVSF06	Z-DENS Flat Flashing 6" (160 mm), 0° - 5°
	2SVSFA06	Z-DENS Adjustable Flashing 6" (160 mm), 0° - 30°

Z-DENS 6" Single Wall Rigid

Polypropylene Vent System for High Efficiency Condensing Appliances

Image	Part ID	Description
	2ZDES6	Z-DENS End Screen 6" (160 mm) Stainless Steel
	2ZDTT6	Z-DENS Termination Tee with Screen 6" (160 mm) Stainless Steel
	2ZDCC6	Z-DENS Chimney Cover 6" (160 mm)
	2ZDRT6	Z-DENS Roof Termination 6" (160 mm) $H_1 = 35.8"$ $H_2 = 59"$ with Bracket PPs/Galvanized-Black
	2ZDFF4	Z-DENS Flat Flashing 4"/6" (110/160 mm) or 6" (160 mm), 0°, $H = 6"$
	2SVSGB06	Z-DENS Guy Band 6" (160 mm) - Stainless Steel
	2ZDLC6	Z-DENS Locking Clamp 6" (160 mm)
	2ZDFB6	Z-DENS Fixing Bracket/Support Clamp (with Rubber Lining) 6" (160 mm)
	2ZDGL	Z-DENS Gasket Lubricant
	2ZDG6	Z-DENS Gasket 6" (160 mm) Replacement Single Wall Rigid - Black EPDM
	2ZDG6V	Z-DENS Gasket 6" (160 mm) Replacement Single Wall Rigid - Red/Brown FKM (Viton®)

Product Catalogue & Dimensional Data
Z-DENS 8" Single Wall Rigid
 Polypropylene Vent System for High Efficiency Condensing Appliances



Image	Part ID	Description
	2ZDZV8	Z-DENS Adaptor 8" Z-Vent to 8" (200 mm) Z-DENS L = 7" L ₁ = 4.3" - Stainless Steel
	2ZDLAMT08	Z-DENS Adaptor -Laars MagnaTherm MGTH/V 2000-2500 to 8" (200 mm) Z-DENS Stainless Steel
	2ZDWASF1008	Z-DENS Adaptor - Weil McLain Slim Fit (SF1000/1500/2000) 10" to 8" (200 mm) Z-DENS L = 15.3" L ₁ = 11.3" - Stainless Steel
	2ZDAEDR8	Z-DENS Adaptor with High Temperature RTV Tube - Fulton Endura 8" to 8" (200 mm) Z-DENS L = 8.8" L ₁ = 4.6" - Stainless Steel
	2ZDAABM08	Z-DENS Adaptor with Viton® Gasket - Aerco Benchmark (BMK 2000/2500/3000) 8" to 8" (200 mm) Z-DENS L = 11.8" L ₁ = 8.5" - Stainless Steel
	2ZDP824	Z-DENS Pipe 8" (200 mm) L = 24" L ₁ = 19.7" UV-Grey
	2ZDP836	Z-DENS Pipe 8" (200 mm) L = 36" L ₁ = 31.7" UV-Grey
	2ZDP872	Z-DENS Pipe 8" 200 mm) L = 72" L ₁ = 67.7" UV-Grey
	2ZDTP8	Z-DENS Test Port 8" (200 mm) L = 16.5" L ₁ = 12.2"
	2ZDE845	Z-DENS Elbow 8" (200 mm) 45° L ₁ = 7.2" L ₃ = 8.9" UV-Grey
	2ZDE887	Z-DENS Elbow 8" (200 mm) 87° L ₁ = 10.1" L ₃ = 10" UV-Grey
	2ZDCD8H	Z-DENS Condensate Drain 8" (200 mm) L = 16.7" L ₁ = 12.4" Horizontal
	2ZDCT	Z-DENS Condensate Trap

Z-DENS 8" Single Wall Rigid


Polypropylene Vent System for High Efficiency Condensing Appliances

Image	Part ID	Description
	2SVSLS08	Z-DENS Storm Collar 8" (200 mm) - Stainless Steel
	2SVSF08	Z-DENS Flat Flashing 8" (200 mm), 0° - 5°
	2SVSFA08	Z-DENS Adjustable Flashing 8" (200 mm), 0° - 30°
	2ZDES8	Z-DENS End Screen 8" (200 mm) - Stainless Steel
	2ZDTT8	Z-DENS Termination Tee with Screen 8" (200 mm) Stainless Steel
	2ZDCC8	Z-DENS Chimney Cover 8" (200 mm)
	2ZDRT8	Z-DENS Roof Termination 8" (200 mm) H ₁ = 35.8" H ₂ = 59" with Bracket PPs/ Galvanized- Black
	2ZDFF8	Z-DENS Flat Flashing 8" (200 mm), 0° H = 10"
	2ZDAFM8	Z-DENS Adjustable Flashing Medium 8" (200mm) 25° - 45°
	2SVSGB08	Z-DENS Guy Band 8" (200 mm) - Stainless Steel
	2ZDLC8	Z-DENS Locking Clamp 8" (200 mm)
	2ZDFB8	Z-DENS Fixing Bracket/Support Clamp (with Rubber Lining) 8" (200 mm)
	2ZDGL	Z-DENS Gasket Lubricant
	2ZDG8	Z-DENS Gasket 8" (200 mm) Replacement Single Wall Rigid - Black EPDM
	2ZDG8V	Z-DENS Gasket 8" (200 mm) Replacement Single Wall Rigid - Red/Brown FKM (Viton®)

Product Catalogue & Dimensional Data
Z-DENS Cascade Systems - SPECIAL ORDER
 Polypropylene Vent System for High Efficiency Condensing Appliances


Image	Part ID	Description
	2ZDCSK43	Z-DENS Cascade Starter Kit 4" x 3" (45°) x 25.6" L
	2ZDCEK43	Z-DENS Cascade Extension Kit 4" x 3" (45°) x 25.6" L
	2ZDCSK53	Z-DENS Cascade Starter Kit 5" x 3" (45°) x 40" L
	2ZDCEK53	Z-DENS Cascade Extension Kit 5" x 3" (45°) x 40" L
	2ZDCSK54	Z-DENS Cascade Starter Kit 5" x 4" (45°) x 40" L
	2ZDCEK54	Z-DENS Cascade Extension Kit 5" x 4" (45°) x 40" L
	2ZDCSK63	Z-DENS Cascade Starter Kit 6" x 3" (45°) x 40" L
	2ZDCEK63	Z-DENS Cascade Extension Kit 6" x 3" (45°) x 40" L
	2ZDCSK64	Z-DENS Cascade Starter Kit 6" x 4" (45°) x 40" L
	2ZDCEK64	Z-DENS Cascade Extension Kit 6" x 4" (45°) x 40" L
	2ZDCSK84	Z-DENS Cascade Starter Kit 8" x 4" (45°) x 44" L
	2ZDCEK84	Z-DENS Cascade Extension Kit 8" X 4" (45°) X 44" L
	2ZDNRV3	Z-DENS Non - Return Valve 3" L = 8.7" L ₁ = 6.9" Swing Check with Water Lock Horizontal/Vertical
	2ZDNRT4	Z-DENS Non - Return Tee 4" L ₁ = 5.9" L ₃ = 3.2" Ball Check Vertical

Starter Kit*

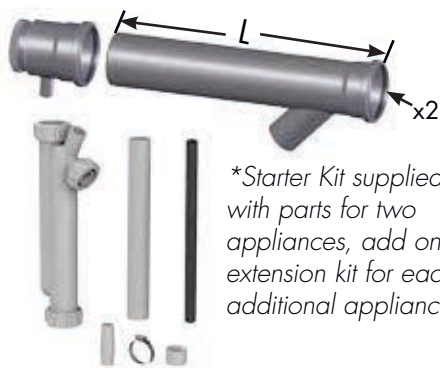

**Starter Kit supplied with parts for two appliances, add on extension kit for each additional appliance.*

Extension Kit

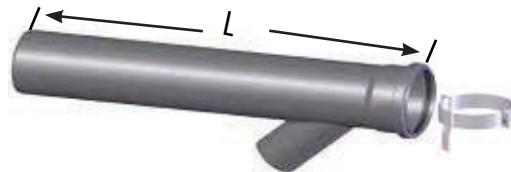








Z-DENS 2"/4" Concentric

Polypropylene Vent System for High Efficiency Condensing Appliances

Image	Part ID	Description
	2ZDCP2412	Z-DENS Concentric Pipe 2"/4" (60/100 mm) L = 12" L ₁ = 10" PPs/Aluminum - White
	2ZDCP2424	Z-DENS Concentric Pipe 2"/4" (60/100 mm) L = 24" L ₁ = 22.1" PPs/Aluminum - White
	2ZDCP2436	Z-DENS Concentric Pipe 2"/4" (60/100 mm) L = 36" L ₁ = 34" PPs/Aluminum - White
	2ZDCAP24	Z-DENS Concentric Adjustable Pipe 2"/4" (60/100 mm) L = 2.6" to 8.3" PPs/Aluminum-White
	2ZDCTP24	Z-DENS Concentric Test Port 2"/4" (60/100 mm) L = 6.9" L ₁ = 4.9" PPs/Aluminum-White
	2ZDCE2445	Z-DENS Concentric Elbow 2"/4" (60/100 mm) 45° L ₁ = 2.8" L ₃ = 3.2" PPs/Aluminum - White
	2ZDCE2487	Z-DENS Concentric Elbow 2"/4" (60/100 mm) 87° L ₁ = 4.3" L ₃ = 4.7" PPs/Aluminum - White
	2ZDCD24	Z-DENS Concentric Drain 2"/4" (60/100 mm) L = 6.9" L ₁ = 4.9" Horizontal/Vertical PPs/Aluminum-White
	2ZDCT	Z-DENS Condensate Trap

Product Catalogue & Dimensional Data
Z-DENS 2"/4" Concentric
Polypropylene Vent System for High Efficiency Condensing Appliances

Image	Part ID	Description
	2ZDTG4	Z-DENS Termination Guard 6" x 6" Stainless Steel Horizontal
	2ZDCTH24	Z-DENS Concentric Termination Horizontal 2"/4" (60/100 mm) L = 31.5"
	2ZDCTV24	Z-DENS Concentric Termination Vertical 2"/4" (60/100 mm) H ₁ = 21.4" H ₂ = 45.3"
	2ZDCRT2440	Z-DENS Concentric Roof Termination EXTENSION 2"/4" (60/100 mm) with Guy Support Bracket L = 40" L ₁ = 37.6"
	2ZDCRT2420	Z-DENS Concentric Roof Termination EXTENSION 2"/4" (60/100 mm) L = 20" L ₁ = 17.9"
	2ZDFF2	Z-DENS Flat Flashing 2"/4" (60/100 mm) or 3"/5" (80/125 mm), 0°, H = 4"
	2ZDAF2	Z-DENS Adjustable Flashing (Small) 2"/4" (60/100 mm) or 3"/5" (80/125 mm) 5° - 25°
	2ZDAFM2	Z-DENS Adjustable Flashing Medium 2"/4" (60/100 mm) or 3"/5" (80/125 mm) 25°-45°

Z-DENS 2"/4" Concentric

Polypropylene Vent System for High Efficiency Condensing Appliances










Image	Part ID	Description
	2ZDCFB4	Z-DENS Concentric Fixing Bracket/Support Clamp (with Rubber Lining) 4" (100 mm)
	2ZDWPT24	Z-DENS Wall Plate Termination SUPPORT 2"/4" (60/100 mm) Aluminum-White
	2ZDWP4	Z-DENS Wall Plate 4" (100 mm) Galvanized-White
	2ZDGL	Z-DENS Gasket Lubricant
	2ZDG2	Z-DENS Gasket 2" (60 mm) - Replacement Rigid or Concentric-Black EPDM
	2ZDG2V	Z-DENS Gasket 2" (60 mm) Replacement Rigid or Concentric Red/Brown FKM (Viton®)

Product Catalogue & Dimensional Data
Z-DENS 3"/5" Concentric
Polypropylene Vent System for High Efficiency Condensing Appliances

Image	Part ID	Description
	2ZDCP3512	Z-DENS Concentric Pipe 3"/5" (80/125 mm) L = 12" L ₁ = 10" PPs/Aluminum-White
	2ZDCP3524	Z-DENS Concentric Pipe 3"/5" (80/125 mm) L = 24" L ₁ = 22.1" PPs/Aluminum-White
	2ZDCP3536	Z-DENS Concentric Pipe 3"/5" (80/125 mm) L = 36" L ₁ = 34" PPs/Aluminum-White
	2ZDCAP35	Z-DENS Concentric Adjustable Pipe 3"/5" (80/125 mm) L = 2.4" to 8.3" PPs/Aluminum-White
	2ZDCTP35	Z-DENS Concentric Test Port 3"/5" (80/125 mm) L = 6.3" L ₁ = 4.3" PPs/Aluminum-White
	2ZDCE3545	Z-DENS Concentric Elbow 3"/5" (80/125 mm) 45° L ₁ = 3.5" L ₃ = 3.5" PPs/Aluminum-White
	2ZDCE3587	Z-DENS Concentric Elbow 3"/5" (80/125 mm) 87° L ₁ = 4.7" L ₃ = 5.1" PPs/Aluminum-White
	2ZDCD35	Z-DENS Condensate Drain 3"/5" (80/125 mm) L = 6.3" L ₁ = 4.3" Horizontal/Vertical PPs/Aluminum-White
	2ZDCT	Z-DENS Condensate Trap

Z-DENS 3"/5" Concentric

Polypropylene Vent System for High Efficiency Condensing Appliances

Image	Part ID	Description
	2ZDI2435	Z-DENS Increaser 2"/4" to 3"/5" (60/100 mm to 80/125 mm) L = 6.9" L ₁ = 4.9" PPs/Aluminum-White
	2ZDTG5	Z-DENS Termination Guard 9"x 9" Stainless Steel Horizontal
	2ZDCTH35	Z-DENS Concentric Termination Horizontal 3"/5" (80/125 mm) L = 30.9"
	2ZDCTV35	Z-DENS Concentric Termination Vertical 3"/5" (80/125 mm) H ₁ = 21.7" H ₂ = 45.6"
	2ZDCRT3540	Z-DENS Concentric Roof Termination EXTENSION 3"/5" (80/125 mm) with Guy Support Bracket L = 40" L ₁ = 37.6"
	2ZDCRT3520	Z-DENS Concentric Roof Termination EXTENSION 3"/5" (80/125 mm) L = 20" L ₁ = 17.9"
	2ZDFF2	Z-DENS Flat Flashing 2"/4" (60/100 mm) or 3"/5" (80/125 mm) 0°, H = 4"
	2ZDAF2	Z-DENS Adjustable Flashing (Small) 2"/4" (60/100 mm) or 3"/5" (80/125 mm) 5°- 25°
	2ZDAFM2	Z-DENS Adjustable Flashing Medium 2"/4" (60/100 mm) or 3"/5" (80/125 mm) 25°- 45°

Product Catalogue & Dimensional Data
Z-DENS 3"/5" Concentric
Polypropylene Vent System for High Efficiency Condensing Appliances



Image	Part ID	Description
	2ZDFB5	Z-DENS Fixing Bracket/Support Clamp (with Rubber Lining) 5" (125 mm)
	2ZDWPT35	Z-DENS Wall Plate Termination SUPPORT 3"/5" (80/125 mm) Aluminum-White
	2ZDWP5	Z-DENS Wall Plate 5" (125 mm) Galvanized-White
	2ZDGL	Z-DENS Gasket Lubricant
	2ZDG3	Z-DENS Gasket 3" (80 mm) - Replacement Rigid or Concentric-Black EPDM
	2ZDG3V	Z-DENS Gasket 3" (80 mm) Replacement Rigid or Concentric Red/Brown FKM (Viton®)

Z-DENS 4"/6" Concentric

Polypropylene Vent System for High Efficiency Condensing Appliances

Image	Part ID	Description
	2ZDCP4612	Z-DENS Concentric 4"/6" (110/160 mm) L = 12" L ₁ = 10" PPs/Aluminum-White
	2ZDCP4624	Z-DENS Concentric 4"/6" (110/160 mm) L = 24" L ₁ = 22.1" PPs/Aluminum-White
	2ZDCP4636	Z-DENS Concentric 4"/6" (110/160 mm) L = 36" L ₁ = 34" PPs/Aluminum-White
	2ZDCAP46	Z-DENS Concentric Adjustable Pipe 4"/6" (110/160 mm) L = 3.2" to 8.3" PPs/Aluminum-White
	2ZDCTP46	Z-DENS Concentric Test Port 4"/6" (110/160 mm) L = 6.9" L ₁ = 4.9" PPs/Aluminum-White
	2ZDCE4645	Z-DENS Concentric Elbow 4"/6" (110/160 mm) 45° L ₁ = 4.3" L ₃ = 4.7" PPs/Aluminum-White
	2ZDCE4687	Z-DENS Concentric Elbow 4"/6" (110/160 mm) 87° L ₁ = 3.3" L ₂ = 6.1" L ₃ = 4.7" PPs/Aluminum-White
	2ZDCD46	Z-DENS Concentric Condensate Drain 4"/6" (110/160 mm) L = 5.9" L ₁ = 3.9" Horizontal/ Vertical PPs/Aluminum-White
	2ZDCT	Z-DENS Condensate Trap

Product Catalogue & Dimensional Data
Z-DENS 4"/6" Concentric
 Polypropylene Vent System for High Efficiency Condensing Appliances

Image	Part ID	Description
	2ZDI3546	Z-DENS Increaser 3"/5" to 4"/6" (80/125 mm to 110/160 mm) L = 6.5" L ₁ = 4.5" PPs/Aluminum-White
	2ZDIS4646	Z-DENS Increaser Small 4"/6" (100/150 mm to 110/160 mm) L = 6.3" L ₁ = 4.3"
	2ZDI4646	Z-DENS Increaser 4"/6" (110/150 mm to 110/160 mm) L = 6.9" L ₁ = 4.9"
	2ZDTG6	Z-DENS Termination Guard 10" x 10" Stainless Steel Horizontal
	2ZDCTH46	Z-DENS Concentric Termination Horizontal 4"/6" (110/160 mm) L = 27"
	2ZDCTV46	Z-DENS Concentric Termination Vertical 4"/6" (110/160 mm) H ₁ = 30.9" H ₂ = 47"
	2ZDFF4	Z-DENS Flat Flashing 4"/6" (110/160 mm) or 6" (160 mm), 0°, H = 6"
	2ZDAF4	Z-DENS Adjustable Flashing (Small) 4"/6" (110/160 mm) 5° - 25°
	2ZDAFM4	Z-DENS Adjustable Flashing Medium 4"/6" (110/160 mm) 25° - 45°

Z-DENS 4"/6" Concentric

Polypropylene Vent System for High Efficiency Condensing Appliances

Image	Part ID	Description
	2ZDFB6	Z-DENS Fixing Bracket/Support Clamp (with Rubber Lining) 6" (160 mm)
" (110/160 mm) Aluminum-White"/>	2ZDWPT46	Z-DENS Wall Plate Termination SUPPORT 4"/>" (110/160 mm) Aluminum-White
	2ZDWP6	Z-DENS Wall Plate 6" (160 mm) Galvanized-White
	2ZDGL	Z-DENS Gasket Lubricant
	2ZDG4	Z-DENS Gasket 4" (110 mm) - Replacement Rigid or Concentric-Black EPDM
	2ZDG4V	Z-DENS Gasket 4" (110 mm) Replacement Rigid or Concentric Red/Brown FKM (Viton®)

Additional Products Available Through Z-Flex®



▶ Z-VENT® Smoothcore™

AL29-4C Stainless Steel flexible vent with smooth inside diameter for Category II, III & IV vent, in 2" to 8" with patented airtight Triple-Lock Construction & exclusive Z-LOK Tee.



▶ Z-VENT® Single or Double Wall

AL29-4C Stainless Steel rigid vent for Category II, III, & IV vent in 3" to 24" diameters with revolutionary double fail safe seal that dramatically reduces the installed vent time and cost.



▶ Triple Lock® & Fabriflex™ Duct

Industry's strongest flexible air duct and connectors. Insulated, acoustical and mechanical lock with no adhesives. UL / ULC Listed for low, medium and high pressure applications.



▶ Platinum Flow™ Innovative **SELF SEALING**

Round Duct System incorporates both factory installed EPDM double safe gaskets and calibrated sizing. Complete system available in single wall, double wall insulated, as well as custom design capabilities. Designed to exceed SMACNA's duct construction standards. Leakage Class 3.

Z-FLEX®

The Engineered Venting Systems Specialists

Recent developments in flue systems for use with high efficiency heating appliances, combined with the increased familiarity of use and installer confidence in polypropylene venting systems, has led to the development and continuous improvement of the polypropylene Z-DENS system.

Z-Flex® now offers the Z-DENS Polypropylene Venting System to our highly acclaimed product line-up.

The NovaFlex Group® is a privately held company committed to continuous advancement in venting, HVAC, hose and connector solutions. NovaFlex® has one of the broadest product ranges available in the hose and ducting marketplace as well as in the HVAC, Industrial Venting and Hose Industries and in Commercial Exhaust Venting Systems.

It is impossible to test all NovaFlex® and ZFlex® products under all of the conditions to which they might be subjected in the field. It is therefore the buyer and/or end users' responsibility to test all products under conditions that duplicate service conditions prior to installation. Due to continuous improvements, technical data in this brochure is subject to change without notice. It is incumbent on installer to determine suitability of product for application and adhere to all local building codes that may or are applicable. Please defer to Novaflex & Z-Flex terms and conditions of sale located at: www.novaflex.com/TermsConditions/



U.S.A.

20 Commerce Park North
Bedford, New Hampshire 03110-6911
tel: 603.669.5136 fax: 603.669.0309
www.z-flex.com email sales@z-flex.com

CANADA

452 Attwell Drive
Etobicoke, ON M9W 5C3
tel: 416.679.0045 fax: 416.679.0051

Ver: 06.01.2016